



COAXIAL

# High Power Amplifier

## ZHL-5W-1+ ZHL-5W-1X+

50Ω 5 W 5 to 500 MHz SMA Female

### FEATURES

- High Power, 5 Watt
- Wideband, 5 to 500 MHz
- High Power Output, +37 dBm Min.
- High Gain, 40 dB Typ.
- Low Noise Figure, 4 dB Typ.
- High IP3, +49 dBm Typ.



Generic photo used for illustration purposes only

<b>Model No.</b>	ZHL-5W-1+	ZHL-5W-1X+ <sup>▲</sup>
<b>Case Style</b>	DDD131	
<b>Connectors</b>	SMA female	

### +RoHS Compliant

The +Suffix identifies RoHS Compliance.  
See our website for methodologies and qualifications

### APPLICATIONS

- VHF
- Instrumentation
- Laboratory

### ELECTRICAL SPECIFICATIONS<sup>1</sup>

Parameter	ZHL-5W-1+ ZHL-5W-1X+ <sup>▲</sup>			Units
	Min.	Typ.	Max.	
Frequency Range	5		500	MHz
Gain	40	45		dB
Gain Flatness			±1.7	dB
Output Power at 1 dB Compression	+37			dBm
Noise Figure		4.0		dB
Output Third Order Intercept Point		+49		dBm
Input VSWR		2.0		:1
Output VSWR		2.5		:1
DC Supply Voltage		+24	+25	V
Supply Current			3.3	A

1. Specified under matched load to 50Ω.

▲ Heatsink not included. Alternative heat sinking and heat removal must be provided by the user to limit maximum base-plate temperature to +65 °C, in order to ensure proper performance. For reference, this requires thermal resistance of user's external heatsink to be 0.3 °C/W max.

### ABSOLUTE MAXIMUM RATINGS

Parameter	Ratings
Operating Temperature	-20 °C to +65 °C
Storage Temperature	-55 °C to +100 °C
Input RF Power (No Damage) <sup>2</sup>	0 dBm

2. Derate maximum input power by 20 dB when load isn't present.  
Permanent damage may occur if any of these limits are exceeded.



COAXIAL


# High Power Amplifier

## ZHL-5W-1+ ZHL-5W-1X+


Mini-Circuits

50Ω 5 W 5 to 500 MHz SMA Female

### OUTLINE DRAWING

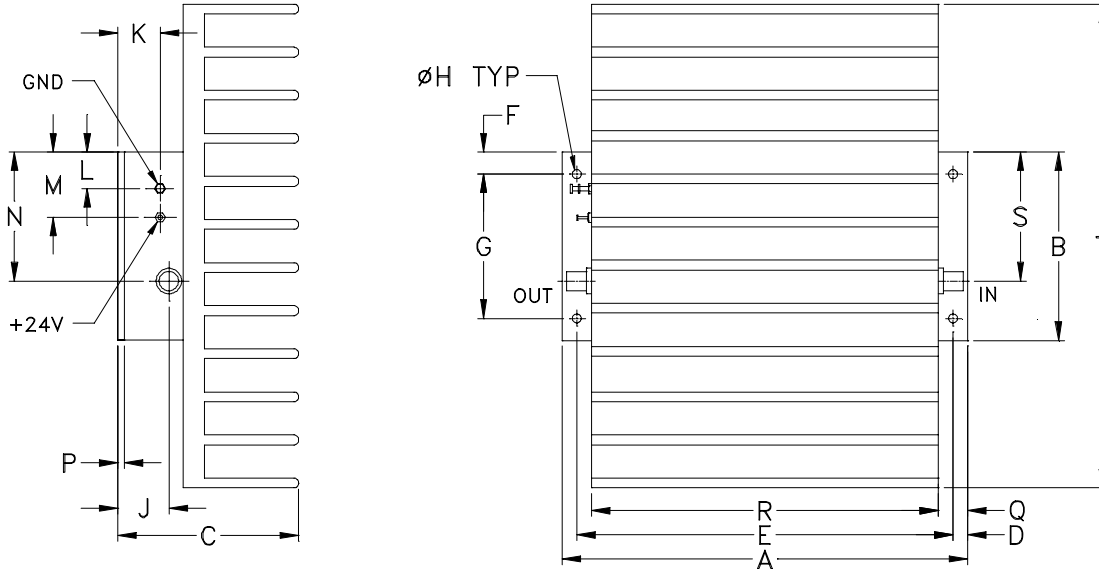

### MOUNTING INFORMATION FOR MODELS WITHOUT HEATSINK

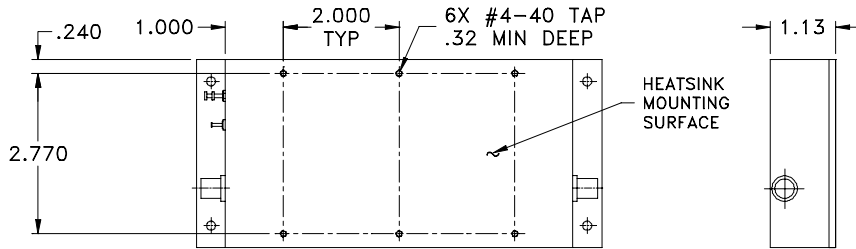

### OUTLINE DIMENSIONS (Inch mm)

A	B	C	D	E	F	G	H	J	K	L	M	N	P	Q	R	S	T	wt
7.00	3.25	3.13	.25	6.500	.38	2.500	.156	.88	.43	.62	1.00	2.63	.125	.50	6.00	2.23	8.35	grams*
177.80	82.55	79.50	6.35	165.10	9.65	63.50	3.96	22.35	10.92	15.75	25.40	66.80	3.18	12.70	152.40	56.64	212.09	1780
																		*510 grams without heatsink









# COAXIAL High Power Amplifier

## ZHL-5W-1+ ZHL-5W-1X+

50Ω 5 W 5 to 500 MHz SMA Female

### TYPICAL PERFORMANCE DATA AND CHARTS

FREQUENCY (MHz)	GAIN (dB)			VSWR (:1)		P <sub>OUT</sub> at 1 dB COMPR. (dBm)	FREQUENCY (MHz)	NOISE FIGURE (dB)
	+23 V	+24 V	+25 V	IN	OUT			
5	44.82	44.8	44.79	1.41	2.24	38.75	10	4.67
10	45.77	45.76	45.71	1.18	2.22	39.69	100	3.79
50	45.99	45.96	45.93	1.12	2.22	39.68	200	3.87
100	46.37	46.40	46.40	1.09	2.30	39.68	300	3.96
140	46.26	46.32	46.35	1.19	2.23	39.71	500	3.91
180	46.13	46.22	46.27	1.26	2.15	39.59		
200	46.12	46.16	46.23	1.26	2.16	39.54		
240	45.76	45.80	45.87	1.17	2.14	39.58		
260	45.32	45.43	45.47	1.14	2.09	39.64		
300	44.40	44.48	44.50	1.27	2.01	39.56		
360	44.72	44.82	44.87	1.50	2.07	39.49		
400	46.08	46.18	46.23	1.48	2.08	39.23		
440	45.69	45.81	45.93	1.43	1.88	39.01		
480	43.67	43.80	43.92	1.51	1.68	38.11		
500	42.93	43.03	43.15	1.51	1.71	37.42		

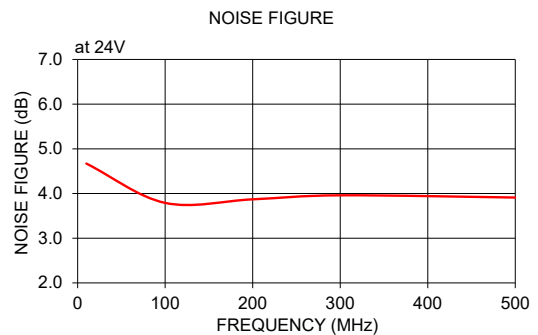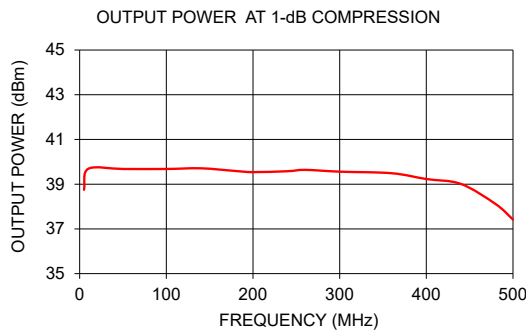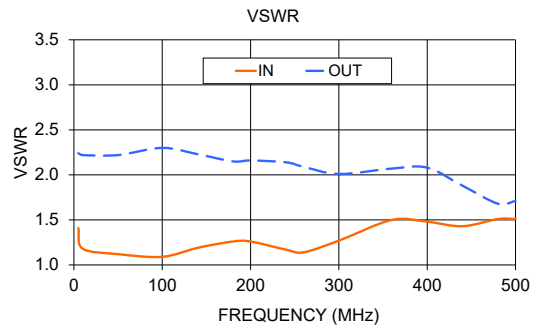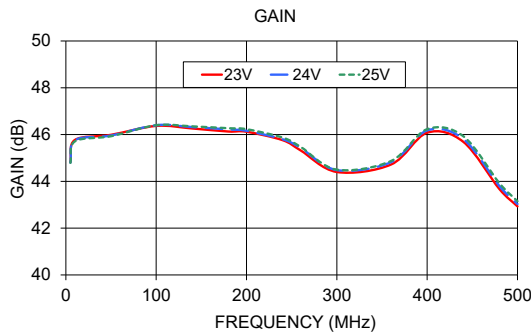

#### NOTES

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the standard terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/terms/viewterm.html](http://www.minicircuits.com/terms/viewterm.html)

