

# Coaxial Low Pass Filter

## ZLFW-K6500+

50Ω DC to 6.5 GHz



Generic photo used for illustration purposes only  
CASE STYLE: UK3042

### The Big Deal

- Good power handling, 2.5W
- Temperature stable
- Broadband connectorized package
- Good rejection, 43 dB typical

### Product Overview

ZLFW-K6500+ is a 50Ω low pass filter built in broadband connectorized package. Covering DC-6.5 GHz bandwidth, these units offer good matching within the passband and good rejection in stopband. ZLFW-K6500 + offer low insertion loss, and good power handling capability. It handles up to 2.5W RF input power and provides a wide operating temperature range from -55°C to 125°C.

### Key Features

Feature	Advantages
Low passband insertion loss	Suitable for high performance application.
2.5W Power handling	Supports a range of system power requirements.
Connectorized package	The connectorized package is easy to interface with other devices and well suited for test setups.

#### Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.  
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.  
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)



# Low Pass Filter

## ZLFW-K6500+

50Ω DC to 6.5 GHz



### Features

- Good rejection 43dB typ.
- Temperature stable

Generic photo used for illustration purposes only

CASE STYLE: UK3042  
Connectors Model  
2.92mm-F ZLFW-K6500+

**+RoHS Compliant**  
The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

### Applications


- Military radios
- Point-Point communication
- 5G Sub 6 GHz
- WiFi
- ISM band

### Electrical Specifications at 25°C

Parameter	F#	Frequency (MHz)	Min.	Typ.	Max.	Unit	
Pass Band	Insertion Loss	DC-F1	DC - 6500	—	1.8	3.1	dB
	Freq. Cut-Off	F2*	7500	—	3.0	—	dB
	Return Loss	DC-F1	DC - 6500	—	13	—	dB
Stop Band	Rejection Loss	F3-F4	9000 - 9500	20	43	—	dB
		F4-F5	9500 - 15000	27	36	—	dB
		F5-F6	15000 - 18500	21	32	—	dB
		F6-F7	18500 - 26500	—	21	—	dB

In Applications where DC voltage is present at either input or output ports, DC blocks are required.  
\* Typically, a ±5% frequency deviation from the stated value may occur on a unit-to-unit basis.

### Functional Schematic

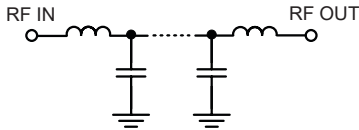

### Maximum Ratings





Operating Temperature	-55°C to 125°C
Storage Temperature	-55°C to 125°C
RF Power Input*	2.5W max. @25°C

\*Passband rating, derate linearly to 0.8W at 125°C ambient  
Permanent damage may occur if any of these limits are exceeded.

### Typical Performance Data at 25°C

Frequency (MHz)	Insertion Loss (dB)	Return Loss (dB)
10	0.07	40.04
100	0.13	33.35
500	0.27	25.72
1000	0.37	22.81
2000	0.53	19.53
3000	0.69	17.62
5000	0.96	26.26
6500	1.52	19.82
7500	3.03	12.44
7960	9.93	3.92
8240	20.07	2.25
8480	30.27	1.86
9000	56.14	1.49
9500	60.02	1.27
12000	46.13	0.89
15000	36.78	1.05
18500	32.66	0.97
20000	33.85	0.99
22000	30.52	1.09
26500	21.45	5.23

### Typical Frequency Response

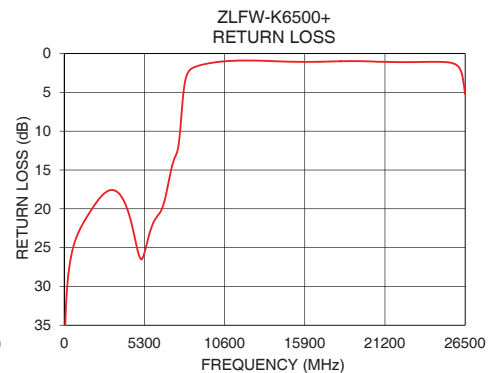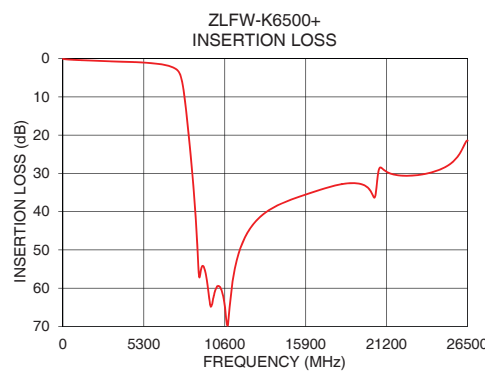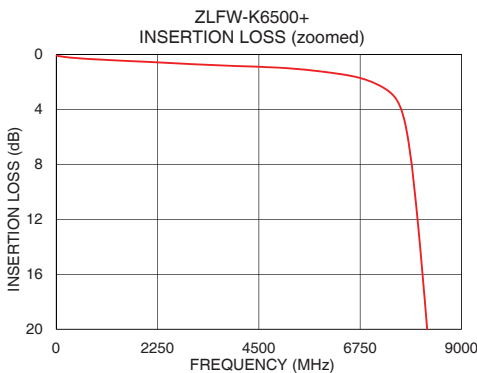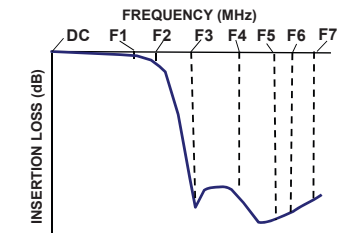

### Notes


- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuits' applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)



**Coaxial Connections**

PORT - 1	2.92mm-Female
PORT - 2	2.92mm-Female

**Outline Drawing**

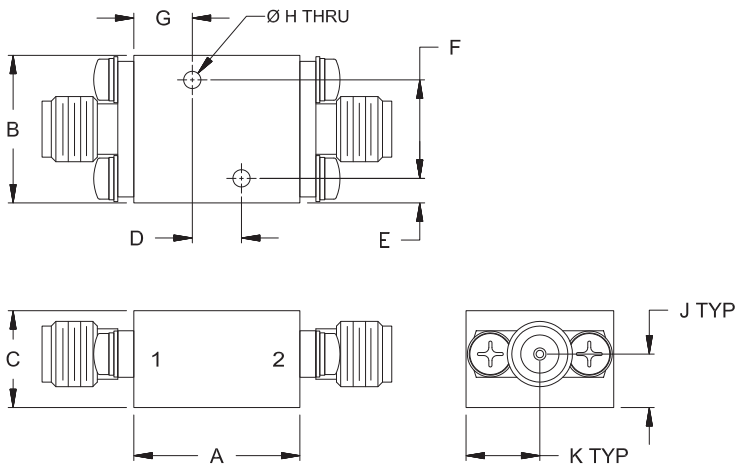

**Outline Dimensions (  $\frac{\text{inch}}{\text{mm}}$  )**

A	B	C	D	E	F
<b>.68</b>	<b>.60</b>	<b>.39</b>	<b>.200</b>	<b>.10</b>	<b>.400</b>
17.1	15.2	10.0	5.08	2.5	10.16
G	H	J	K	Wt.	
<b>.24</b>	<b>.070</b>	<b>.22</b>	<b>.30</b>	grams	
6.0	1.78	5.5	7.6	<b>24</b>	

Note: Please refer to case style drawing for details

**Notes**

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)

