

2 Way-0° 50Ω 1500 to 2000 MHz

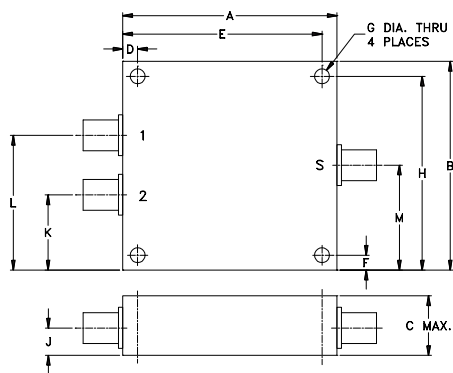
**Maximum Ratings**

|                             |                             |
|-----------------------------|-----------------------------|
| Operating Temperature       | -55°C to 100°C              |
| Storage Temperature         | -55°C to 100°C              |
| Power Input (as a splitter) | 10W max.                    |
| Internal Dissipation        | 0.125W max.                 |
| DC Current                  | 1.0 A (500mA for each port) |

Permanent damage may occur if any of these limits are exceeded.

**Coaxial Connections**

|         |   |
|---------|---|
| SUMPORT | S |
| PORT 1  | 1 |
| PORT 2  | 2 |

**Outline Drawing****Outline Dimensions (inch/mm)**

| A     | B     | C     | D    | E     | F    | G    | H     | J    | K     | L     | M     | wt    |
|-------|-------|-------|------|-------|------|------|-------|------|-------|-------|-------|-------|
| 1.80  | 1.75  | .66   | .125 | 1.675 | .125 | .125 | 1.625 | .31  | .63   | 1.13  | .88   | grams |
| 45.72 | 44.45 | 16.76 | 3.18 | 42.55 | 3.18 | 3.18 | 41.28 | 7.87 | 16.00 | 28.70 | 22.35 | 65.2  |

**Features**

- low insertion loss, 0.2 dB typ.
- good isolation, 24 dB typ.
- up to 10W power input as a splitter
- excellent amplitude unbalance, 0.1 dB typ.
- excellent phase unbalance, 0.2 deg. typ.
- excellent VSWR, 1.1:1 typ.
- rugged shielded case

**Applications**

- PCS/DCS
- GPS
- communications systems
- instrumentations



CASE STYLE: VVV180

| Connectors | Model         |
|------------|---------------|
| SMA        | ZN2PD-1900W-S |

**+RoHS Compliant**

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

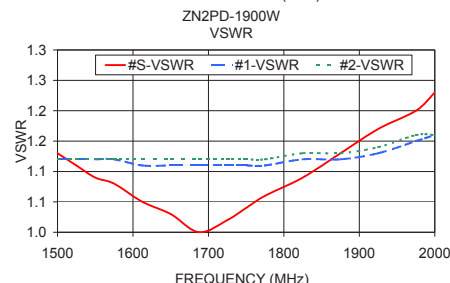
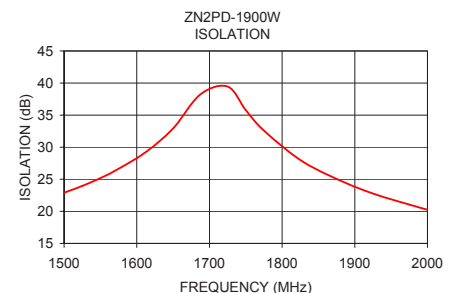
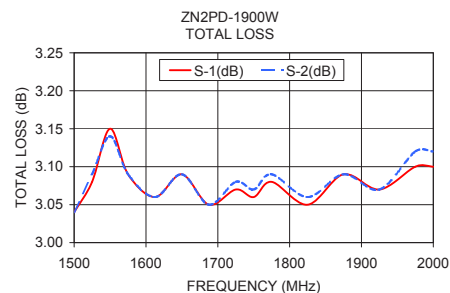
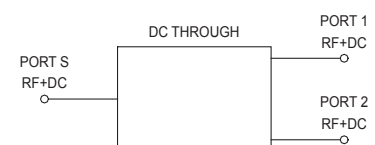
**Electrical Specifications**

| FREQ. RANGE (MHz) | ISOLATION (dB) |      | INSERTION LOSS (dB) ABOVE 3.0 dB |      | PHASE UNBALANCE (Degrees) | AMPLITUDE UNBALANCE (dB) | VSWR (:1) |      |      |      |
|-------------------|----------------|------|----------------------------------|------|---------------------------|--------------------------|-----------|------|------|------|
| $f_L - f_U$       | Typ.           | Min. | Typ.                             | Max. | Max.                      | Max.                     | S         |      | OUT  |      |
| 1500-2000         | 24             | 15   | 0.2                              | 0.5  | 3                         | 0.3                      | Typ.      | Max. | Typ. | Max. |

**Typical Performance Data**

| Frequency (MHz) | Total Loss <sup>1</sup> (dB) |      | Amplitude Unbalance (dB) | Isolation (dB) | Phase Unbalance (deg.) | VSWR S | VSWR 1 | VSWR 2 |
|-----------------|------------------------------|------|--------------------------|----------------|------------------------|--------|--------|--------|
|                 | S-1                          | S-2  |                          |                |                        |        |        |        |
| 1500.00         | 3.04                         | 3.04 | 0.00                     | 22.90          | 0.09                   | 1.13   | 1.12   | 1.12   |
| 1525.00         | 3.08                         | 3.09 | 0.00                     | 23.96          | 0.16                   | 1.11   | 1.12   | 1.12   |
| 1550.00         | 3.15                         | 3.14 | 0.01                     | 25.18          | 0.13                   | 1.09   | 1.12   | 1.12   |
| 1575.00         | 3.09                         | 3.09 | 0.00                     | 26.64          | 0.09                   | 1.08   | 1.12   | 1.12   |
| 1612.50         | 3.06                         | 3.06 | 0.00                     | 29.24          | 0.16                   | 1.05   | 1.11   | 1.12   |
| 1650.00         | 3.09                         | 3.09 | 0.00                     | 32.93          | 0.11                   | 1.03   | 1.11   | 1.12   |
| 1687.50         | 3.05                         | 3.05 | 0.01                     | 38.23          | 0.18                   | 1.00   | 1.11   | 1.12   |
| 1725.00         | 3.07                         | 3.08 | 0.01                     | 39.45          | 0.12                   | 1.02   | 1.11   | 1.12   |
| 1750.00         | 3.06                         | 3.07 | 0.01                     | 35.77          | 0.13                   | 1.04   | 1.11   | 1.12   |
| 1775.00         | 3.08                         | 3.09 | 0.00                     | 32.58          | 0.18                   | 1.06   | 1.11   | 1.12   |
| 1825.00         | 3.05                         | 3.06 | 0.01                     | 28.01          | 0.11                   | 1.09   | 1.12   | 1.13   |
| 1875.00         | 3.09                         | 3.09 | 0.00                     | 25.05          | 0.22                   | 1.13   | 1.12   | 1.13   |
| 1925.00         | 3.07                         | 3.07 | 0.00                     | 22.78          | 0.23                   | 1.17   | 1.13   | 1.14   |
| 1975.00         | 3.10                         | 3.12 | 0.02                     | 21.05          | 0.23                   | 1.20   | 1.15   | 1.16   |
| 2000.00         | 3.10                         | 3.12 | 0.02                     | 20.25          | 0.19                   | 1.23   | 1.16   | 1.16   |

1. Total Loss = Insertion Loss + 3dB splitter loss.

**electrical schematic****Notes**

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.  
 B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.  
 C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)

