

Power Splitter/Combiner

ZN2PD-920-S+

2 Way-0° 50Ω 800 to 920 MHz



Generic photo used for illustration purposes only

CASE STYLE: VVV180

Connectors	Model
SMA	ZN2PD-920-S+

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Maximum Ratings


Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
Power Input (as a splitter)	10W max.
Internal Dissipation	0.125W max.

DC Current 800 mA (400mA for each port)
Permanent damage may occur if any of these limits are exceeded.

Coaxial Connections

SUM PORT	S
PORT 1	1
PORT 2	2

Outline Drawing

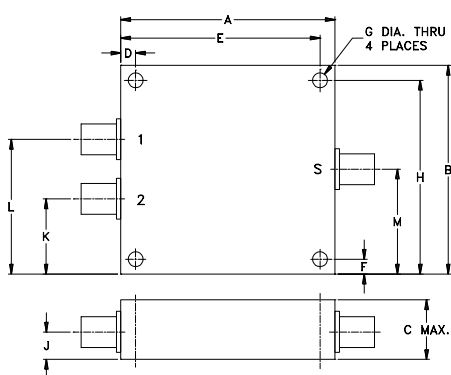

Outline Dimensions (inch/mm)

A	B	C	D	E	F	G	
1.80	1.75	.66	.125	1.675	.125	.125	
45.72	44.45	16.76	3.18	42.55	3.18	3.18	
H	J	K	L	M			wt
1.625	.31	.63	1.13	.88			grams
41.28	7.87	16.00	28.70	22.35			65.2

Features

- low insertion loss, 0.15 dB typ.
- high isolation, 30 dB typ.
- up to 10W power input as a splitter
- excellent amplitude unbalance, 0.1 dB typ.
- excellent phase unbalance, 0.5 deg. typ.
- excellent VSWR, 1.05:1 typ.
- rugged shielded case

Applications

- UHF
- cellular
- communications systems
- instrumentations




Electrical Specifications

FREQ. RANGE (MHz)	ISOLATION (dB)		INSERTION LOSS (dB) ABOVE 3.0 dB		PHASE UNBALANCE (Degrees)	AMPLITUDE UNBALANCE (dB)	VSWR (:1)			
	Typ.	Min.	Typ.	Max.			S		OUT	
$f_c - f_u$					Max.	Max.	Typ.	Max.	Typ.	Max.
800-920	30	20	0.15	0.4	2	0.2	1.10	1.2	1.04	1.2


Typical Performance Data

Frequency (MHz)	Total Loss ¹ (dB)		Amplitude Unbalance (dB)	Isolation (dB)	Phase Unbalance (deg.)	VSWR S	VSWR 1	VSWR 2
	S-1	S-2						
800.00	3.10	3.09	0.01	27.34	0.46	1.06	1.01	1.02
806.00	3.10	3.09	0.02	28.19	0.36	1.05	1.01	1.02
812.00	3.11	3.09	0.02	29.09	0.39	1.04	1.01	1.02
818.00	3.11	3.11	0.01	30.15	0.43	1.04	1.01	1.02
827.00	3.14	3.13	0.01	31.96	0.45	1.02	1.01	1.02
836.00	3.15	3.13	0.02	34.22	0.43	1.01	1.01	1.02
845.00	3.11	3.10	0.01	37.23	0.43	1.01	1.01	1.02
854.00	3.06	3.05	0.01	41.65	0.42	1.01	1.01	1.02
860.00	3.07	3.06	0.01	45.76	0.41	1.02	1.01	1.02
866.00	3.10	3.08	0.01	48.47	0.50	1.03	1.01	1.02
878.00	3.12	3.10	0.02	40.73	0.45	1.04	1.01	1.02
890.00	3.07	3.06	0.01	35.58	0.44	1.06	1.01	1.02
902.00	3.07	3.06	0.02	32.26	0.47	1.08	1.01	1.02
911.00	3.12	3.11	0.01	30.40	0.49	1.09	1.01	1.02
920.00	3.16	3.14	0.01	28.92	0.41	1.10	1.01	1.02

1. Total Loss = Insertion Loss + 3dB splitter loss.

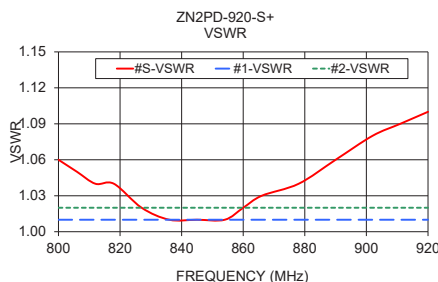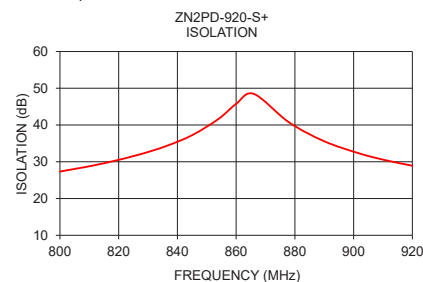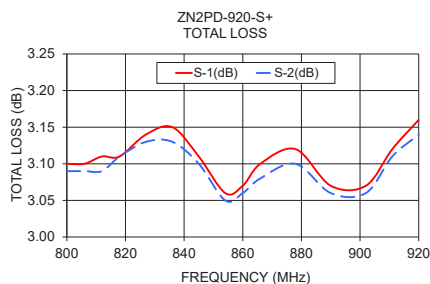

electrical schematic

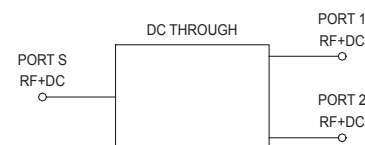

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
 B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
 C. The parts covered by this specification document are subject to Mini-Circuit's standard limited warranty and terms and conditions (collectively, "Standard Terms"). Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuit's website at www.minicircuits.com/MCLStore/terms.jsp

