

DC Pass, Ultra-Thin


Power Splitter/Combiner

ZN8PD-272SMP+

8 Way-0° 50Ω 690 to 2750 MHz

The Big Deal

- Wideband, 690 to 2750 MHz
- Low insertion loss, 0.8 dB
- High-Power Handling, 10W as a splitter
- Ultra-thin case, 0.3" height (7.92mm)
- SMP snap-on connectors

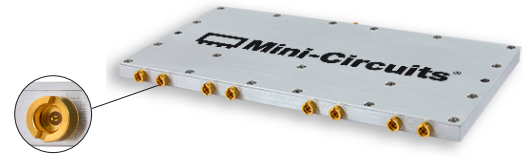

CASE STYLE: UU2046

Product Overview

Mini-Circuits' ZN8PD-272SMP+ is an 8-way 0° splitter/combiner supporting a wide variety of applications from 690 to 2750 MHz. This model is capable of handling up to 10W RF input power as a splitter and provides low insertion loss, high isolation, low amplitude unbalance, and low phase unbalance. It comes housed in an ultra-thin, aluminum alloy case (6.60 x 3.26 x 0.30") with SMP snap-on connectors, saving space in crowded system layouts.

Key Features

Feature	Advantages
Wideband, 690 to 2750 MHz	ZN8PD-272SMP+ supports bandwidth requirements for a wide variety of applications.
Ultra-thin case design, 6.60 x 3.26 x 0.30"	Saves space in crowded system layouts.
Blind mate, snap-on SMP connectors	Blind mate SMP connectors enable direct connection to adjacent modules while facilitating thin case height.
High power handling: <ul style="list-style-type: none">• 10W as a splitter• 6W as a combiner	Suitable for a variety of system power requirements.
Low insertion loss, 0.8 dB	Provides excellent signal power transmission, making this model ideal for signal distribution applications where low loss is a requirement.
Low unbalance: <ul style="list-style-type: none">• 0.1 dB amplitude unbalance• 2.0° phase unbalance	Produces nearly equal output signals, ideal for parallel path / multichannel systems.
DC Passing, 1400mA (175mA each port)	Supports applications where DC power is needed at later stages in the system.

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



Power Splitter/Combiner

ZN8PD-272SMP+

8 Way-0° 50Ω 690 to 2750 MHz

Maximum Ratings


Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
DC Current	1400 mA (175mA for each port)

Permanent damage may occur if any of these limits are exceeded.

Coaxial Connections

SUM PORT	S
PORT 1,2,3,4,5,6,7,8	1,2,3,4,5,6,7,8


Outline Drawing

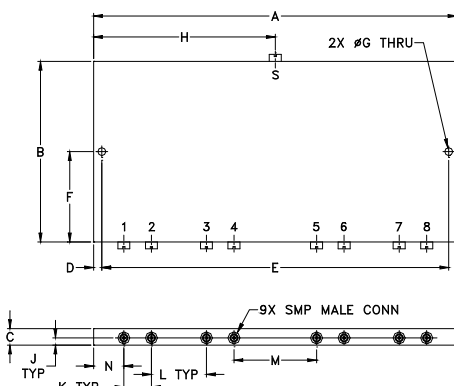

Outline Dimensions (inch/mm)

A	B	C	D	E	F	G	H
6.60	3.28	.30	.150	6.300	1.64	0.144	3.30
167.64	83.312	7.62	3.81	160.02	41.656	3.66	83.82
J	K	L	M	N	P	wt	
.13	.500	1.000	1.500	.550	--	grams	
3.30	12.70	25.40	38.10	13.97	--	190	

Electrical Schematic



Features

- Ultra-thin package
- Snap-on blind mate SMP connectors
- Wideband, 690-2750 MHz
- Excellent amplitude unbalance, 0.1 dB typ.
- Excellent phase unbalance, 2 deg. typ.
- Up to 10W power input as splitter
- High Isolation, 23 dB typ.

Applications

- Dense Packaging Environment
- Automated Test Systems
- Cellular/ISM/SMG/GSM
- Satellite Distribution
- GPS/L BAND (MARSAT)
- CATV

Electrical Specifications at 25°C




Parameter	Frequency (MHz)	Min.	Typ.	Max.	Unit
Frequency Range		690		2750	MHz
Insertion Loss Above 9.0 dB	690 - 2750	—	0.8	1.6	dB
Isolation	690 - 2750	20	23	—	dB
Phase Unbalance	690 - 2750	—	2.0	8.0	Degree
Amplitude Unbalance	690 - 2750	—	0.1	0.4	dB
VSWR (Port S)	690 - 2750	—	1.25	1.65	:1
VSWR (Port 1-8)	690 - 2750	—	1.15	1.35	:1
Power Handling	As Splitter ¹	690 - 2750	—	10	Watt
	As Combiner ²	690 - 2750	—	6	

1. All outputs must terminate 50 ohm (VSWR 1.5:1 or better)
2. As a combiner of non-coherent signals, max. power per port is 6.0 watt power rating divided by number of ports.

Typical Performance Data

Freq. (MHz)	Total Loss ¹ (dB)						Amp. Unb. (dB)	Isolation (dB)				Phase Unb. (deg.)	VSWR S	VSWR 1	VSWR 8
	S-1	S-2	S-3	S-4	S-6	S-8		1-2	2-3	3-4	6-7				
700	9.68	9.68	9.68	9.67	9.57	9.67	0.11	26.01	34.40	26.26	33.62	0.88	1.40	1.13	1.11
800	9.58	9.58	9.59	9.58	9.48	9.57	0.11	32.94	40.26	33.33	42.76	1.05	1.06	1.10	1.09
900	9.61	9.60	9.62	9.61	9.50	9.58	0.12	29.07	35.95	29.61	37.24	1.10	1.04	1.09	1.07
1000	9.67	9.67	9.69	9.67	9.55	9.63	0.15	25.63	33.16	26.23	33.48	1.33	1.15	1.08	1.06
1100	9.74	9.73	9.75	9.74	9.63	9.71	0.13	26.02	31.47	26.68	31.17	1.50	1.26	1.11	1.08
1200	9.72	9.71	9.73	9.72	9.62	9.68	0.12	25.07	33.61	25.27	32.80	1.49	1.14	1.09	1.06
1300	9.80	9.80	9.81	9.80	9.69	9.76	0.13	23.65	44.65	23.80	41.46	1.62	1.26	1.15	1.10
1400	9.83	9.83	9.84	9.83	9.73	9.79	0.12	28.05	39.23	28.46	38.82	1.78	1.29	1.21	1.17
1600	9.85	9.86	9.87	9.85	9.74	9.81	0.13	43.53	42.08	47.73	38.15	1.87	1.23	1.21	1.19
1800	9.90	9.93	9.95	9.91	9.80	9.86	0.15	25.70	29.92	26.24	30.23	2.10	1.28	1.12	1.14
2000	9.90	9.93	9.94	9.90	9.79	9.84	0.15	24.78	33.07	24.90	35.40	2.56	1.12	1.10	1.11
2200	9.96	9.99	9.99	9.95	9.84	9.87	0.15	25.88	44.09	26.12	36.55	2.57	1.13	1.13	1.12
2400	10.01	10.03	10.05	10.00	9.89	9.92	0.16	33.71	36.71	30.81	36.22	3.01	1.13	1.08	1.08
2600	10.07	10.08	10.12	10.06	9.94	9.96	0.19	33.43	33.72	34.05	32.83	3.03	1.16	1.11	1.12
2750	10.16	10.16	10.22	10.13	9.98	10.00	0.24	26.75	30.67	27.23	30.71	3.36	1.24	1.17	1.15

1. Total Loss = Insertion Loss + 9dB splitter loss.

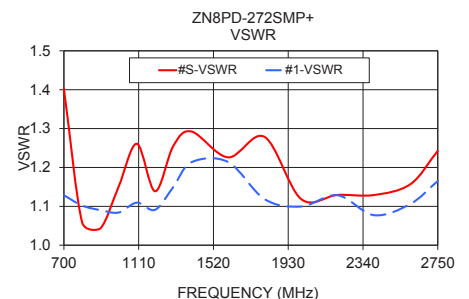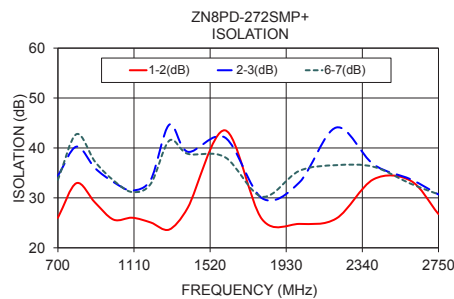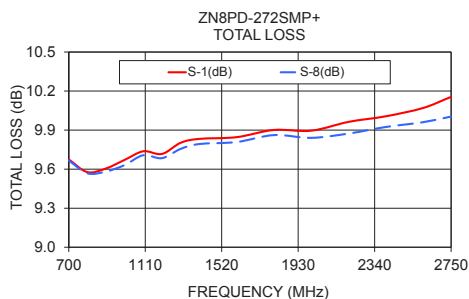

Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuit's standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuit's website at www.minicircuits.com/MCLStore/terms.jsp



CASE STYLE: UU2046

Connectors	Model
SMP (Snap-on)	ZN8PD-272SMP+

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications