

Coaxial Frequency Mixer

Level 7 (LO Power +7 dBm) 0.15 to 400 MHz

ZP-3+



BNC version shown
CASE STYLE: GG60

Maximum Ratings

Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
RF Power	50mW
IF Current	40mA

Coaxial Connections

LO	L
RF	R
IF	X

Features

- low conversion loss, 4.7 dB typ.
- IF response to DC
- excellent L-R isolation, 46 dB typ., L-I, 47 dB typ.
- rugged shielded case

Applications


- VHF/UHF
- cellular
- instrumentation

Connectors	Model	Price	Qty.
BNC	ZP-3+	\$39.95 ea.	(1-9)
SMA	ZP-3-S+	\$44.95 ea.	(1-9)

+ RoHS compliant in accordance with EU Directive (2002/95/EC)

The +Suffix has been added in order to identify RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications.

Outline Drawing

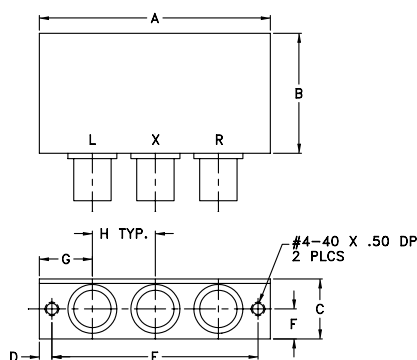

Outline Dimensions (inch/mm)

A	B	C	D	E	F	G	H	wt
2.31	1.20	.60	.125	2.062	.30	.53	.63	grams
58.7	30.5	15.2	3.2	52.4	7.6	13.5	16.0	75.0

Electrical Specifications

FREQUENCY (MHz)		CONVERSION LOSS (dB)				LO-RF ISOLATION (dB)						LO-IF ISOLATION (dB)					
		Mid-Band m				L			M			U			L		
		$\bar{X}$	σ	Max.	Total Range Max.	Typ.	Min.	Typ.	Min.	Typ.	Min.	Typ.	Min.	Typ.	Min.	Typ.	Min.
0.15-400	DC-400	4.7	0.10	7.0	8.0	60	50	46	30	35	25	60	40	47	25	35	20

1 dB COMP.: +1 dBm typ.

For phase detection, DC output has positive polarity with in-phase LO and RF signals.

L = low range [f_L to $10 f_L$]

m = mid band [$2f_L$ to $f_U/2$]


M = mid range [$10 f_L$ to $f_U/2$]

U = upper range [$f_U/2$ to f_U]

Typical Performance Data

Frequency (MHz)		Conversion Loss (dB)	VSWR RF Port (:1)	Frequency (MHz)	Isolation L-R (dB)	Isolation L-I (dB)	VSWR LO Port (:1)
RF	LO						
		LO +7dBm	LO +7dBm		LO +7dBm	LO +7dBm	LO +7dBm
0.15	30.15	5.37	1.57	10.00	68.68	61.84	2.59
0.23	30.23	5.27	1.41	20.00	65.36	56.87	2.60
0.30	30.30	5.21	1.33	30.00	63.22	54.20	2.59
0.50	30.50	5.16	1.25	40.00	61.75	52.09	2.58
1.00	31.00	5.08	1.21	76.00	57.56	47.59	2.54
2.80	32.80	4.91	1.21	94.00	56.48	45.97	2.50
6.40	36.40	4.91	1.21	112.00	54.90	44.70	2.50
10.00	40.00	4.73	1.21	149.00	52.63	42.36	2.57
28.00	58.00	4.71	1.21	168.00	54.13	42.02	2.55
64.00	94.00	4.75	1.17	206.00	49.62	38.81	2.62
100.00	130.00	4.83	1.14	225.00	48.10	38.56	2.66
138.00	168.00	4.85	1.13	244.00	48.03	37.82	2.68
157.00	187.00	4.88	1.10	282.00	53.65	37.79	2.67
195.00	225.00	4.92	1.08	301.00	55.10	38.07	2.76
233.00	263.00	4.97	1.10	320.00	54.03	37.59	2.82
252.00	282.00	5.10	1.12	340.00	52.86	36.62	2.76
271.00	301.00	5.17	1.14	360.00	51.53	35.44	2.69
290.00	320.00	5.15	1.17	390.00	47.44	33.11	2.86
370.00	340.00	5.38	1.10	410.00	45.39	32.24	3.05
400.00	370.00	5.41	1.05	430.00	44.42	32.17	3.06

Electrical Schematic

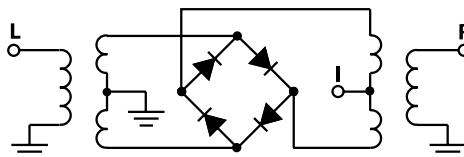

Mini-Circuits®
ISO 9001 ISO 14001 CERTIFIED

ALL NEW
minicircuits.com

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site



The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com

RF/IF MICROWAVE COMPONENTS

REV. B
M108294
ZP-3+
DJ/TD/CP
070321
Page 1 of 2

