



RACK-MOUNTED

# Splitter/Combiner Panel

# ZT-394

Mini-Circuits

50Ω 0.6 to 6 GHz 16-Way SMA Female

### THE BIG DEAL

- Rack-mounted RF splitter/combiner panel
- 16-way splitter in 1U rack space
- In-line connector configuration
- Wide bandwidth

### APPLICATIONS

- Production test setups
- Satcom signal distribution
- Cellular test applications
- 5G FR1, Bluetooth & WiFi signal distribution

### PRODUCT OVERVIEW

Mini-Circuits panel-mounted structures provide clean, organized management of cable runs and connections in complex, high-volume test setups. Multiple connector adapters, power splitters, directional couplers, and other essential RF components and test accessories can be integrated efficiently within the test system. Custom configurations are available upon request.

ZT-394 is a rack-mounted 16-way splitter/combiner requiring only 1U of rack space. The wide 600-6000 MHz bandwidth of operation covers a key portion of the cellular and Satcom signal frequencies with low insertion loss and high isolation between ports.

The orientation of the SMA connectors supports straight-through connections within the rack, with ports 1-16 on the front panel and the sum port accessible from the rear.


### ELECTRICAL SPECIFICATIONS AT +25°C (EACH SPLITTER)

Parameter	Conditions	Min.	Typ.	Max.	Units
Frequency		600		6000	MHz
Insertion Loss (Above Theoretical 12 dB)	600 – 700 MHz		0.8	1.4	dB
	700 – 3000 MHz		1.7	3.0	
	3000 – 6000 MHz		3.2	4.0	
Isolation	600 – 6000 MHz	16	22		dB
Return Loss (Port S)	600 – 700 MHz		15		dB
	700 – 3000 MHz		16		
	3000 – 6000 MHz		16		
Return Loss (Ports 1 – 8)	600 – 700 MHz		20		dB
	700 – 3000 MHz		22		
	3000 – 6000 MHz		20		
Input Power	CW (as splitter into 1.2:1 max load VSWR)			30	W



Generic photo used for illustration purposes only

### FUNCTIONAL BLOCK DIAGRAM

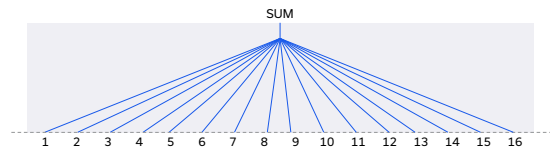

REV. B  
ECO-021095  
ZT-394  
MCL NY  
240306





RACK-MOUNTED





# Splitter/Combiner Panel

ZT-394

Mini-Circuits

50Ω 0.6 to 6 GHz 16-Way SMA Female

## TYPICAL PERFORMANCE GRAPHS

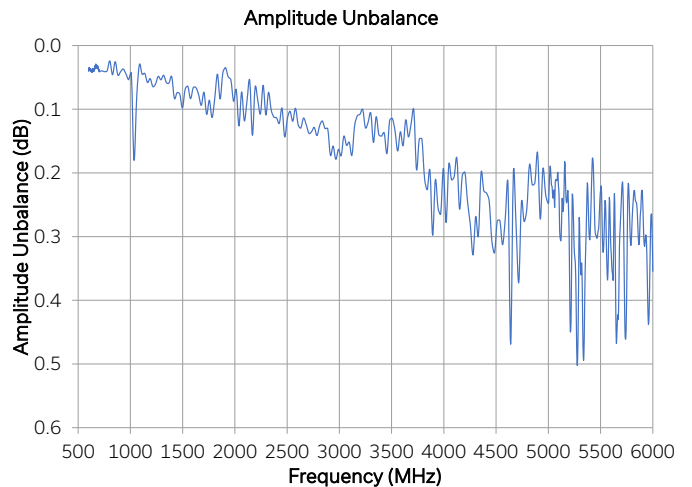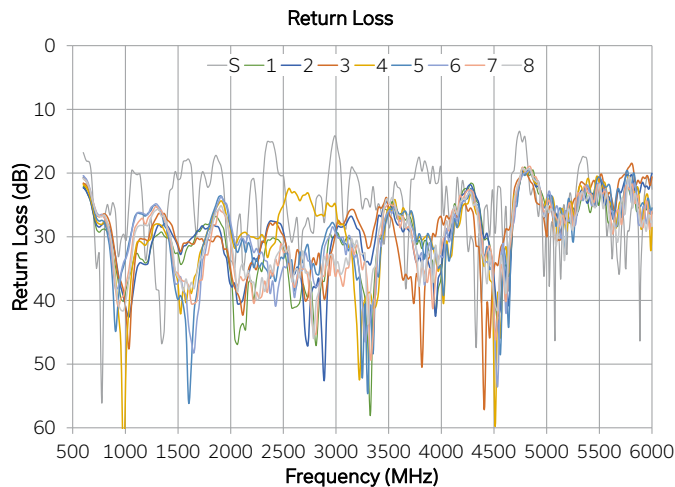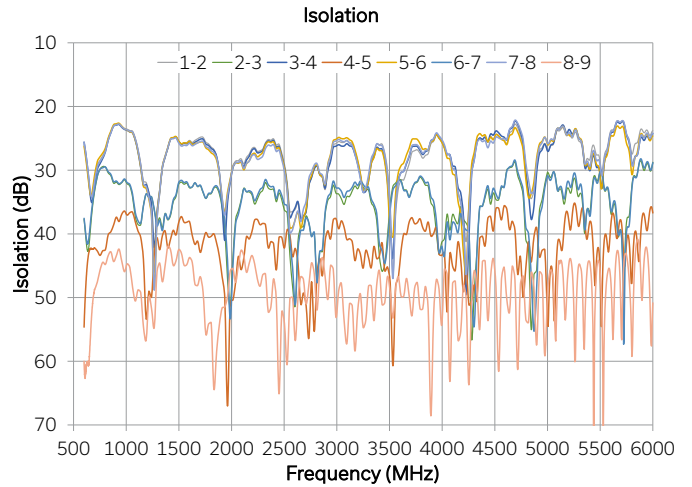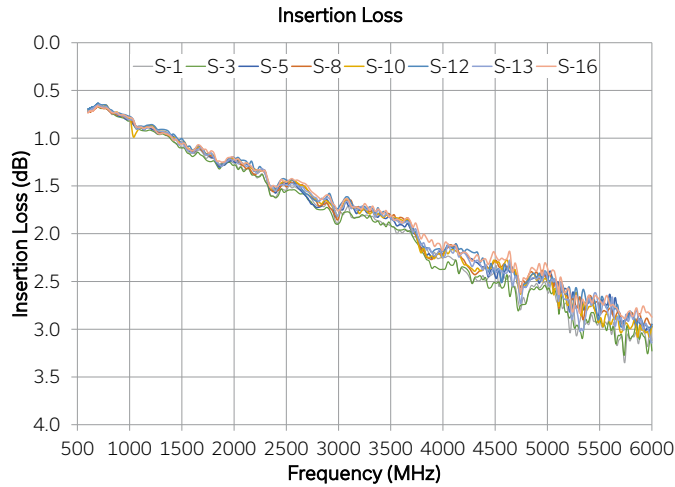



RACK-MOUNTED

# Splitter/Combiner Panel

## ZT-394

Mini-Circuits

50Ω 0.6 to 6 GHz 16-Way SMA Female

### ABSOLUTE MAXIMUM RATINGS


Parameter	Conditions	Limits	Units
Temperature	Operating	0 to +50	°C
	Storage	-20 to +60	

Permanent damage may occur if any of these limits are exceeded. Operating in the range between operating power limits and absolute maximum ratings for extended periods of time may result in reduced life and reliability.

### CONNECTIONS

Port	Connector
Sum & 1-16	SMA female

### OUTLINE DRAWING

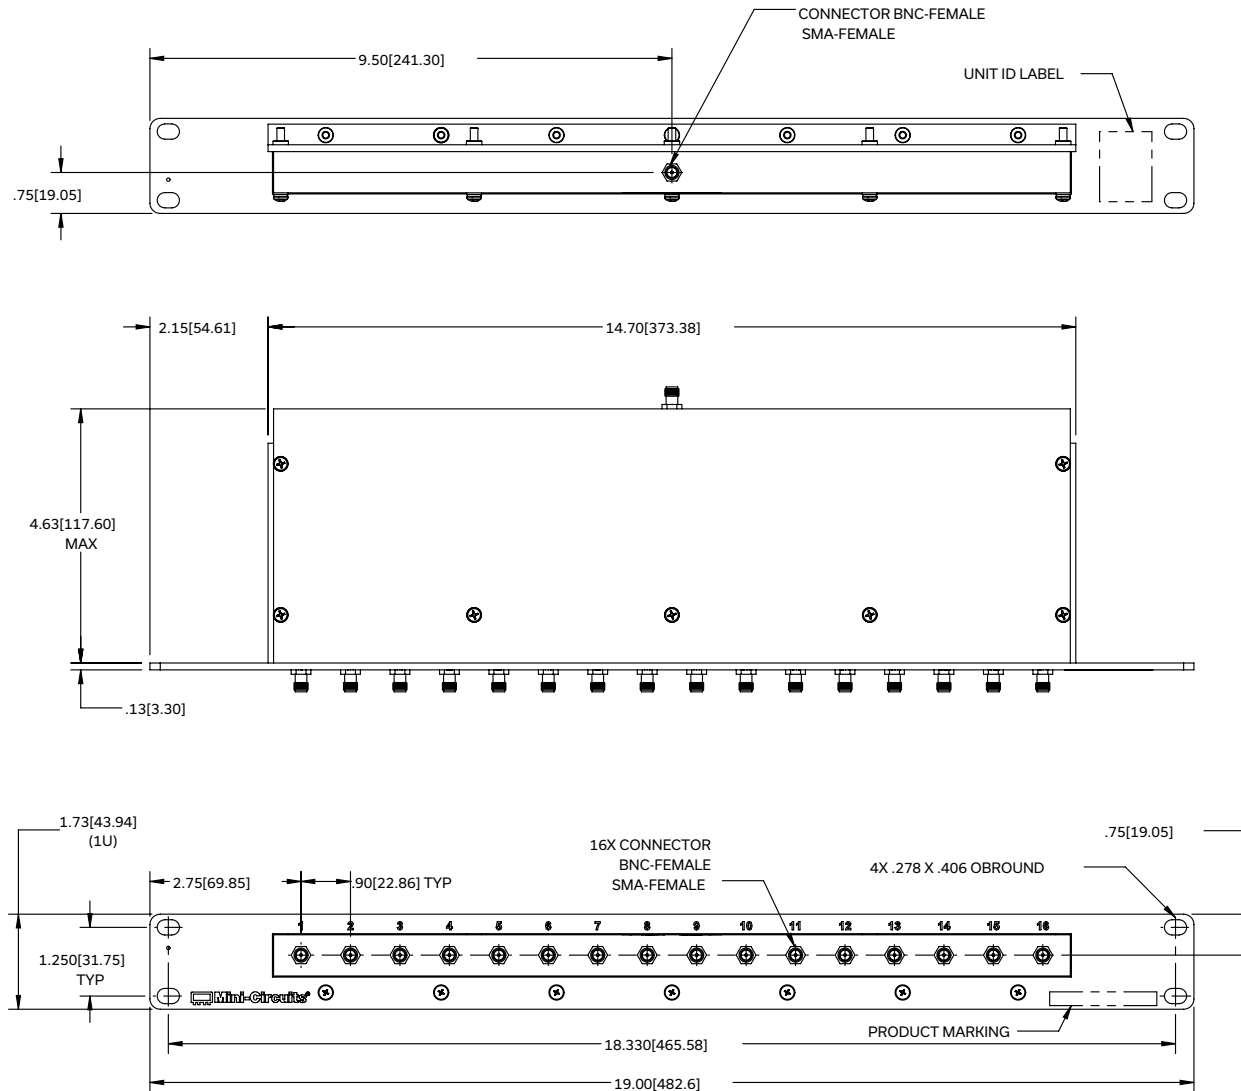

Weight: 1520 grams.

Dimensions are in inches [mm]. Tolerances: 2 Pl. ±.03 inch; 3 Pl. ±.015 inch.

### PRODUCT MARKING\*

Product Marking: ZT-394

Unit ID Label: Serial number and other identification marks

\*Marking may contain other features or characters for internal lot control





RACK-MOUNTED


# Splitter/Combiner Panel

ZT-394

Mini-Circuits


50Ω 0.6 to 6 GHz 16-Way SMA Female

DETAILED MODEL INFORMATION IS AVAILABLE ON OUR WEBSITE [CLICK HERE](#)

Case Style	YN3415
Environmental Rating	ENV55
Regulatory Compliance	<p>Refer to our website for compliance methodologies and qualifications</p>  <p><a href="http://www.minicircuits.com/quality/environmental_introduction.html">www.minicircuits.com/quality/environmental_introduction.html</a></p>

Contact Us: [testsolutions@minicircuits.com](mailto:testsolutions@minicircuits.com)

## ORDERING INFORMATION

Included Accessories	Part Number	Description
	HT-4-SMA	SMA connector wrench (4" length)

- NOTES**
- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
  - B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
  - C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the standard terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/terms/viewterm.html](http://www.minicircuits.com/terms/viewterm.html)

