

Frequency Mixer

ZX05-10H-S+

Level 17 (LO Power +17 dBm) 10 to 1000 MHz


Maximum Ratings

Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
RF Power	200mW
IF Current	40mA
Permanent damage may occur if any of these limits are exceeded.	

Coaxial Connections

LO	1
RF	2
IF	3

Outline Drawing

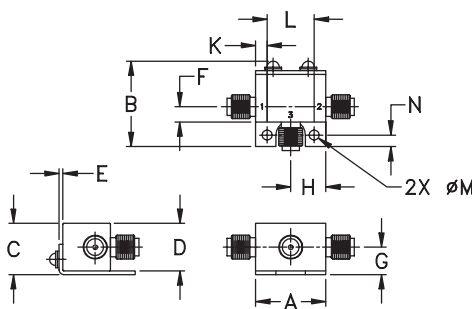

Outline Dimensions (inch/mm)

A	B	C	D	E	F	G
.74	.90	.54	.50	.04	.16	.29
18.80	22.86	13.72	12.70	1.02	4.06	7.37
H	J	K	L	M	N	wt
.37	--	.122	.496	.106	.122	grams
9.40	--	3.10	12.60	2.69	3.10	20.0

Features

- rugged construction
- small size
- low conversion loss
- high L-R isolation
- protected by US Patents 6,133,525; 6,790,049 & 6,947,717

Applications

- cellular
- PCS
- instrumentation
- satellite communication

Electrical Specifications (T_{AMB}=25°C)

FREQUENCY (MHz)		CONVERSION LOSS (dB)				LO-RF ISOLATION (dB)						LO-IF ISOLATION (dB)						IP3 at center band (dBm)
LO/RF f_L - f_U	IF	Mid-Band m		Total Range Max.		L		M		U		L		M		U		
		$\overline{X}$	σ	Max.	Max.	Typ.	Min.	Typ.	Min.	Typ.	Min.	Typ.	Min.	Typ.	Min.	Typ.	Min.	
		7.0	0.1	8.5	9.5	68	52	55	38	47	25	46	30	32	20	26	13	
10-1000	DC-800																	22


1 dB COMP: +14 dBm typ.
Conversion Loss increases when IF is above 150 MHz.

L = low range [f_L to 10 f_L]
m = mid band [2f_L to f_U/2]
M = mid range [10 f_L to f_U/2] U = upper range [f_U/2 to f_U]

Typical Performance Data

Frequency (MHz)		Conversion Loss (dB)	Isolation L-R (dB)	Isolation L-I (dB)	VSWR RF Port (:1)	VSWR LO Port (:1)
RF	LO	LO +17dBm	LO +17dBm	LO +17dBm	LO +17dBm	LO +17dBm
10.10	40.10	7.55	81.69	62.06	1.43	1.13
50.10	80.10	7.39	69.91	47.32	1.39	1.09
100.10	70.10	7.47	64.18	40.85	1.40	1.13
143.85	113.85	7.39	61.39	37.09	1.39	1.18
215.10	185.10	7.24	56.02	32.50	1.38	1.20
262.60	232.60	7.10	54.66	30.65	1.38	1.19
310.10	280.10	7.07	53.72	29.51	1.40	1.20
357.60	327.60	7.02	53.34	28.60	1.39	1.17
405.10	375.10	7.15	51.82	28.24	1.40	1.20
452.60	422.60	7.04	50.25	27.84	1.39	1.18
500.10	470.10	7.24	48.94	27.66	1.41	1.24
552.10	522.10	7.17	46.94	27.44	1.39	1.23
616.10	586.10	7.30	45.19	27.21	1.38	1.30
648.10	618.10	7.31	44.07	27.04	1.38	1.32
712.10	682.10	7.39	42.17	25.98	1.35	1.34
776.10	746.10	7.14	39.71	24.50	1.32	1.45
840.10	810.10	7.25	36.65	23.70	1.28	1.53
904.10	874.10	7.47	34.81	23.29	1.26	1.56
968.10	938.10	7.65	33.06	22.47	1.23	1.69
1000.10	970.10	7.67	32.44	21.87	1.23	1.70

Electrical Schematic

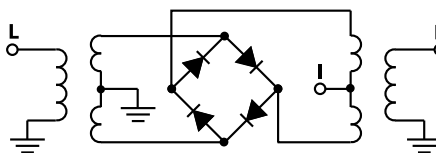








Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
C. The parts covered by this specification document are subject to Mini-Circuit's standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuit's website at www.minicircuits.com/MCLStore/terms.jsp



Performance Charts

ZX05-10H-S+

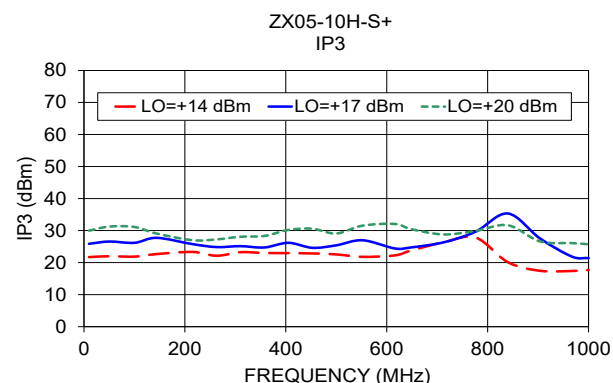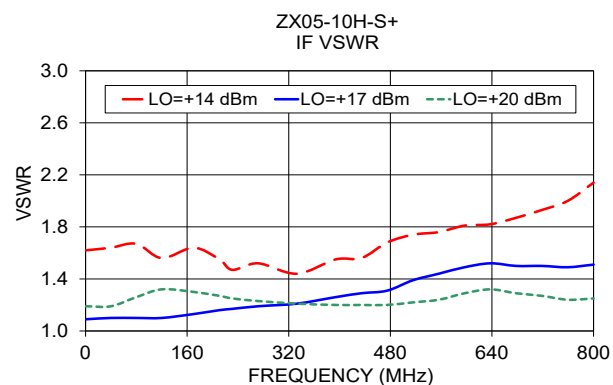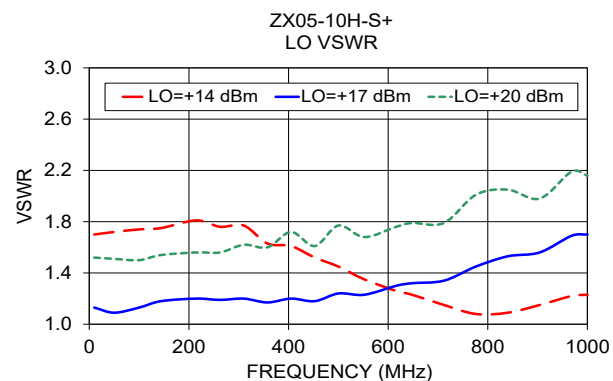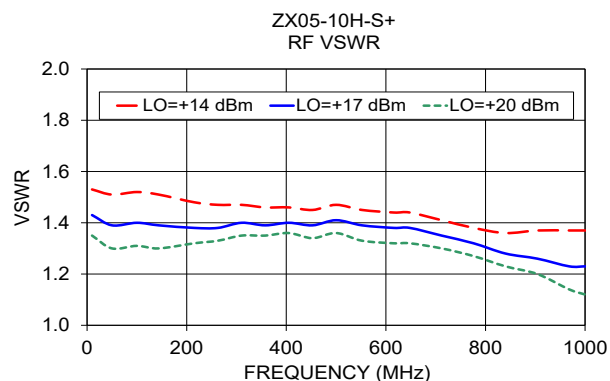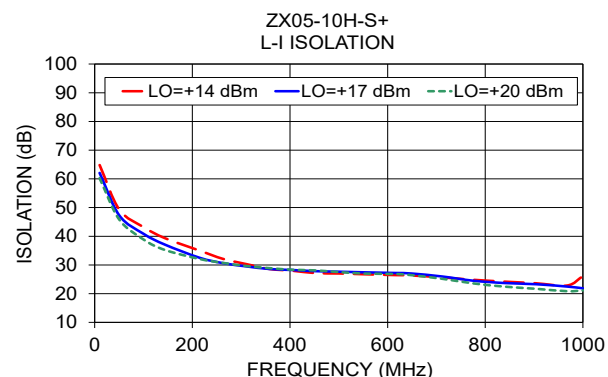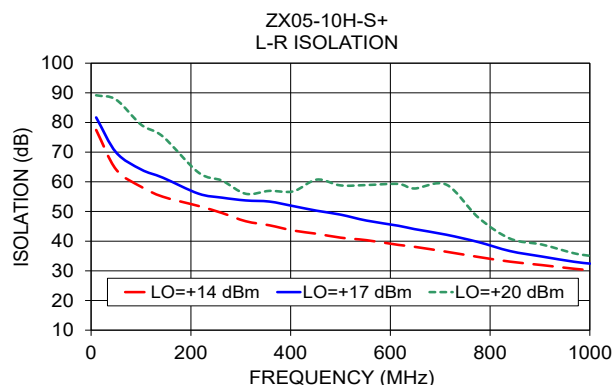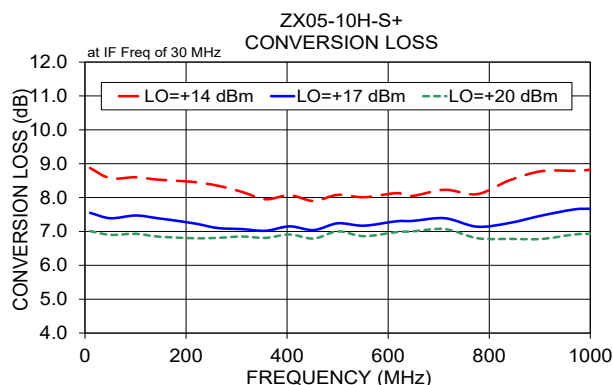

Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp

