

Coaxial Frequency Mixer

Level 7 (LO Power +7 dBm) 5 to 1500 MHz

ZX05-5+
ZX05-5



CASE STYLE: FL905

Maximum Ratings

Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
RF Power	50mW
IF Current	40mA

Coaxial Connections

LO	1
RF	2
IF	3

Features

- rugged construction
- small size
- low conversion loss
- high L-R isolation
- protected by US Patents 6,133,525 & 6,790,049

Applications


- cellular
- PCS
- instrumentation
- satellite communication

Connectors	Model	Price	Qty.
SMA	ZX05-5-S(+)	\$37.95 ea.	(1-24)

+ RoHS compliant in accordance with EU Directive (2002/95/EC)

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications.

Outline Drawing

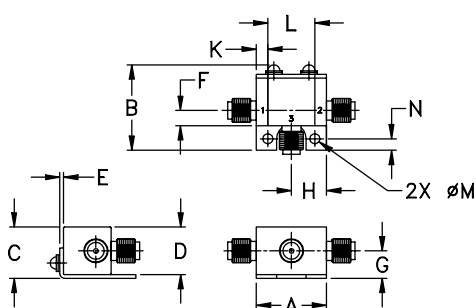

Outline Dimensions (inch/mm)

A	B	C	D	E	F	G
.74	.90	.54	.50	.04	.16	.29
18.80	22.86	13.72	12.70	1.02	4.06	7.37

H	J	K	L	M	N	wt
.37	--	.122	.496	.106	.122	grams
9.40	--	3.10	12.60	2.69	3.10	20.0

Electrical Specifications (T_{AMB}=25°C)

FREQUENCY (MHz)		CONVERSION LOSS (dB)				LO-RF ISOLATION (dB)						LO-IF ISOLATION (dB)						IP3 at center band (dBm)
LO/RF f _L -f _U	IF	Mid-Band m		Total Range Max.		L		M		U		L		M		U		
		$\bar{X}$	σ			Max.	Typ.	Min.	Typ.	Min.	Typ.	Min.	Typ.	Min.	Typ.	Min.		
5-1500	DC-1000	6.6	0.1	7.5	9.3	50	40	40	25	33	23	50	40	30	20	20	10	15

1 dB COMP.: +1 dBm typ.

Positive detection: positive output with in-phase RF & LO signals

L = low range [f_L to 10 f_L]

m = mid band [2 f_L to f_U/2]


M = mid range [10 f_L to f_U/2]

U = upper range [f_U/2 to f_U]

Typical Performance Data

Frequency (MHz)		Conversion Loss (dB)	Isolation L-R (dB)	Isolation L-I (dB)	VSWR RF Port (:1)	VSWR LO Port (:1)
RF	LO	LO +7dBm	LO +7dBm	LO +7dBm	LO +7dBm	LO +7dBm
5.10	35.10	6.93	82.10	96.28	1.48	1.83
35.10	65.10	6.51	65.10	76.81	1.38	1.80
50.10	80.10	6.48	61.74	69.65	1.37	1.80
100.10	70.10	6.60	55.18	56.54	1.36	1.77
171.43	141.43	6.54	50.58	45.84	1.35	1.80
254.10	224.10	6.51	47.52	39.83	1.33	1.78
336.77	306.77	6.56	45.52	36.24	1.32	1.78
419.43	389.43	6.63	43.47	34.05	1.31	1.78
502.10	472.10	6.58	42.13	31.97	1.30	1.81
584.77	554.77	6.56	40.92	30.53	1.28	1.82
667.43	637.43	6.64	37.49	29.33	1.25	1.84
750.10	720.10	6.78	35.27	28.03	1.24	1.87
831.53	801.53	6.81	34.84	25.74	1.19	1.90
934.39	904.39	6.70	33.83	23.60	1.09	1.91
1037.24	1007.24	6.59	33.85	22.24	1.05	1.97
1140.10	1110.10	6.66	33.64	21.45	1.20	2.09
1242.96	1212.96	7.02	32.75	20.75	1.41	2.22
1345.81	1315.81	7.39	31.63	18.60	1.62	2.15
1448.67	1418.67	7.75	29.54	17.12	1.84	2.01
1500.10	1470.10	7.94	28.84	17.08	1.93	2.06

Electrical Schematic

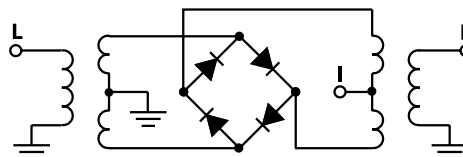

Mini-Circuits®
ISO 9001 ISO 14001 CERTIFIED

ALL NEW
minicircuits.com

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site










The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com

RF/IF MICROWAVE COMPONENTS

REV. C
M111708
ZX05-5
RVN/TD/CP
070525
Page 1 of 2

Performance Charts

**ZX05-5+
ZX05-5**

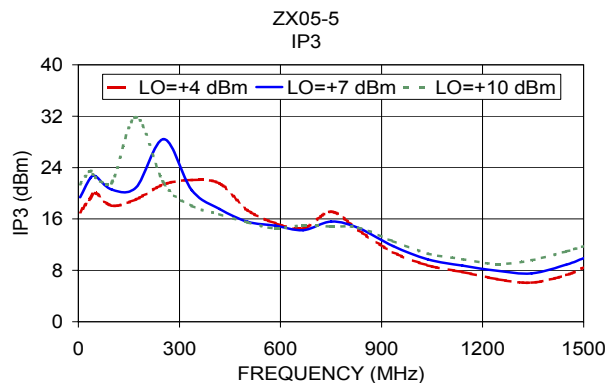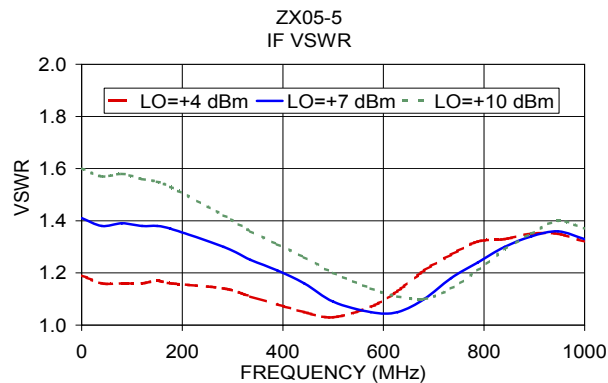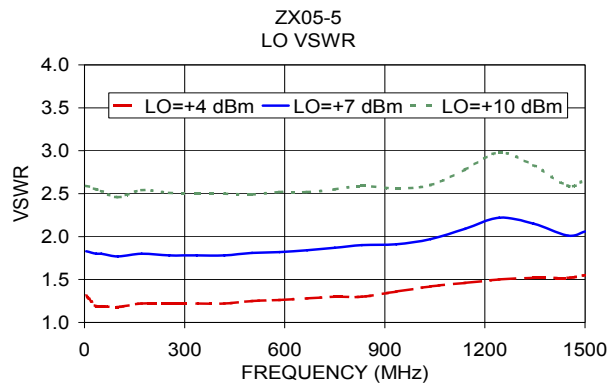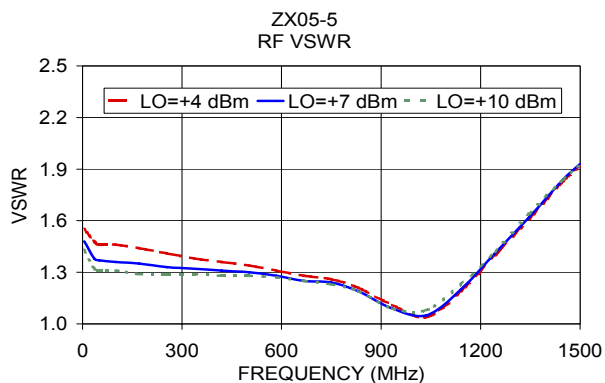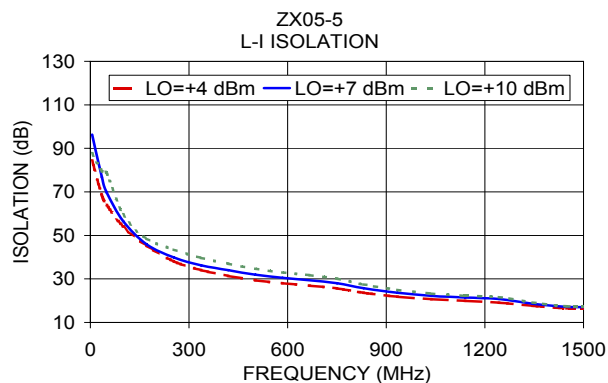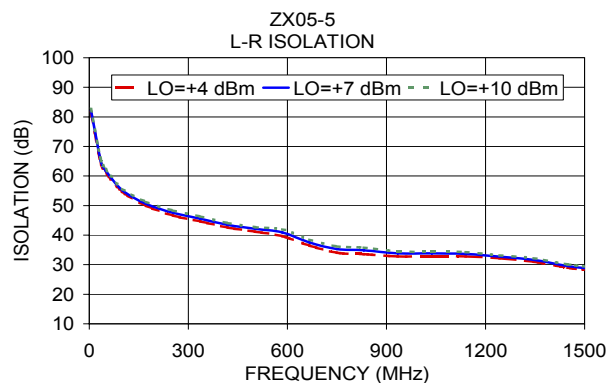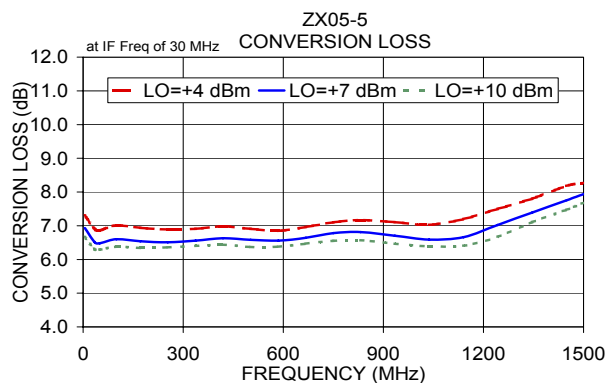

Mini-Circuits®
ISO 9001 ISO 14001 CERTIFIED

ALL NEW
minicircuits.com

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site



The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com

RF/IF MICROWAVE COMPONENTS