

Coaxial Reflectionless High Pass Filter

ZXHF Series

50Ω DC to 30 GHz



The Big Deal

- Patented design eliminates in band spurs
- Wideband performance up to 30 GHz

Product Overview

Mini-Circuits' ZXHF Series reflectionless filters employ a novel filter topology which absorbs and terminates stop band signals internally rather than reflecting them back to the source. Reflectionless filters eliminate stopband reflections, allowing them to be paired with sensitive devices and used in applications that otherwise require circuits such as isolation amplifiers or attenuators. This is developed in a new broadband, stable connectorized package.

Key Features

Feature	Advantages
Easy integration with sensitive reflective components, e.g. mixers, multipliers	Reflectionless filters absorb unwanted signals, preventing reflections back to the source. This reduces generation of additional unwanted signals without the need for extra components like attenuators, improving system dynamic range.
Cascadable	Reflectionless filters can be cascaded in multiple sections to provide sharper and higher attenuation, while also preventing any standing waves that could affect pass band signals.
Excellent stability over temperature	Minimal variation in electrical performance across temperature.
Operating temperature up to 105°C	Suitable for operation close to high power components.
Broadband connectorized package	The connectorized package works well even in high frequencies and easy to interface with other devices. This is well suited for test setups.

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



Coaxial Reflectionless High Pass Filter

ZXHF-K143M+

50Ω 13900 to 19000 MHz



Generic photo used for illustration purposes only

Features

- Match to 50Ω in the stop band, eliminates undesired reflections
- Cascadable
- Temperature stable, up to 105°C
- Protected by US Patent No. 8,392,495 ; 9,705,467, additional patent pending
- Protected by China Patent 201080014266.1
- Protected by Taiwan Patent I581494

Applications

- Military/Defense
- Satellite communication
- Mobile
- Space research

CASE STYLE: UK3042
Connectors Model
2.92mm-F ZXHF-K143M+

Electrical Specifications at 25°C

Parameter	F#	Frequency (MHz)	Min.	Typ.	Max.	Unit	
Stop Band	Rejection	DC-F1	DC- 7000	24	27	-	dB
		F1-F2	7000 - 9000	21	24	-	dB
	Freq. Cut-Off	F3	11200	-	3.5	-	dB
	VSWR	DC-F1	DC- 7000	-	1.2	-	:1
		F1-F2	7000 - 9000	-	1.5	-	:1
Pass Band	Insertion Loss	F4-F5	13900 - 15000	-	2.2	3.0	dB
		F5-F6	15000 - 19000	-	2.0	4.0	dB
	VSWR	F4-F5	13900 - 15000	-	1.2	-	:1
		F5-F6	15000 - 19000	-	1.6	-	:1

Absolute Maximum Ratings³

Parameter	Ratings
Operating Temperature	-55°C to +105°C
Storage Temperature	-55°C to +105°C
RF Power Input, Passband (F4-F6) ¹	1W at 25°C
RF Power Input, Stopband (DC-F4) ²	1.25W at 25°C

¹ Passband rating derates linearly to 0.5W at 105°C ambient


² Stopband rating derates linearly to 0.63W at 105°C ambient

³ Permanent damage may occur if any of these limits are exceeded


ESD rating

Human body model (HBM): Class 2(Pass 2000V) in accordance with ANSI/ESD 5.1-2001

Functional Schematic

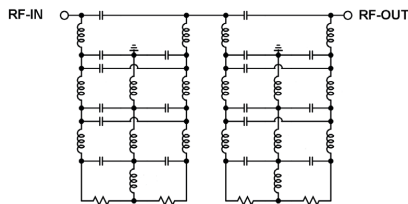

Typical Frequency Response


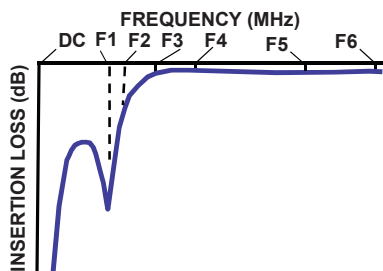


Typical Performance Data at 25°C

Frequency (MHz)	Insertion Loss (dB)	VSWR (:1)
1	69.00	1.18
100	62.85	1.17
500	42.86	1.19
3000	32.04	1.22
5000	36.44	1.22
7000	35.21	1.37
8000	26.31	1.54
9000	34.02	1.33
10000	10.84	1.43
10500	5.82	1.27
11200	3.67	1.45
13000	2.37	1.45
13500	2.14	1.25
13900	2.03	1.12
14000	2.01	1.09
14500	1.94	1.10
15000	1.92	1.20
17000	1.72	1.12
18000	1.65	1.24
19000	1.73	1.42

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

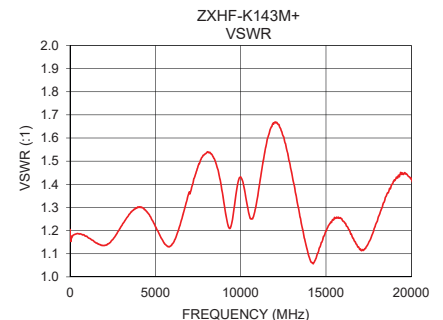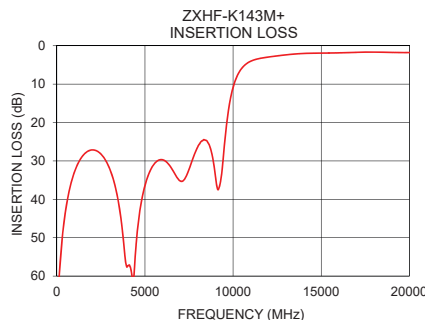

Notes


- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuits' applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



Coaxial Connections

PORT - 1	2.92mm-Female
PORT - 2	2.92mm-Female

Outline Drawing

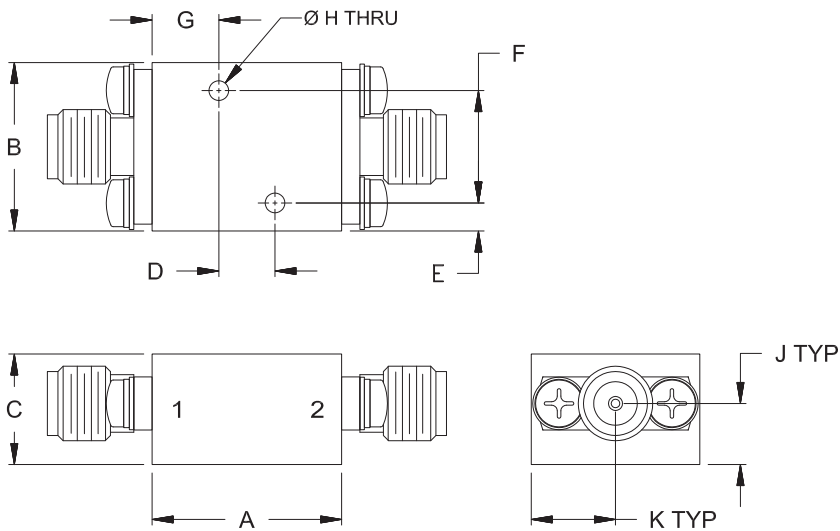

Outline Dimensions ($\frac{\text{inch}}{\text{mm}}$)

A	B	C	D	E	F
.68	.60	.39	.200	.10	.400
17.1	15.2	10.0	5.08	2.5	10.16
G	H	J	K	Wt.	
.24	.070	.22	.30	grams	
6.0	1.78	5.5	7.6	24	

Note: Please refer to case style drawing for details

Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp

