

CERAMIC BALUN

RF Transformer

TCW2-272+

50Ω 2100 to 2700 MHz 1:2 Ratio

FEATURES

- Wideband, 2100 to 2700 MHz
- Low phase unbalance, 5 deg. and amplitude unbalance, 0.6 dB typ.
- Miniature size 0603 (1.6x0.8mm)
- LTCC construction
- Low cost
- Aqueous washable



Generic photo used for illustration purposes only

CASE STYLE: JC0603C

+RoHS Compliant

The +Suffix identifies RoHS Compliance.
See our website for methodologies and qualifications

APPLICATIONS

- WLAN
- WiMAX/WiBRO
- ISM
- Radar

ELECTRICAL SPECIFICATIONS AT 25°C

Parameter	Frequency (MHz)	Min.	Typ.	Max.	Unit
Impedance Ratio (Secondary/Primary)		2			
Frequency Range		2100	—	2700	MHz
Avg. Insertion Loss ¹	2400 - 2500	—	1.1	1.4	dB
	2100 - 2700	—	1.3	—	
Amplitude Unbalance	2400 - 2500	—	0.6	1.4	dB
	2100 - 2700	—	0.8	—	
Phase Unbalance ²	2400 - 2500	—	4	10	Degree
	2100 - 2700	—	8	—	

1. Reference demo board TB-793+.


2. Relative to 180°


MAXIMUM RATINGS

Parameter	Ratings
Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
RF Power ³	2W

3. Passband rating, derate linearly to 1W at 100°C ambient
Permanent damage may occur if any of these limits are exceeded.

CONFIGURATION J

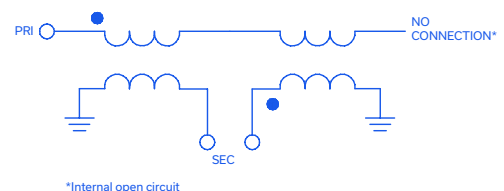



Mini-Circuits®

CERAMIC BALUN

RF Transformer

TCW2-272+


50Ω 2100 to 2700 MHz 1:2 Ratio

PAD CONNECTIONS

PRIMARY DOT (Unbalanced Port)	1
PRIMARY (GND)	3
SECONDARY DOT (Balanced)	4
SECONDARY (Balanced)	6
NO CONNECTION	2,5

PRODUCT MARKING: N/A

DEMO BOARD MCL P/N: TB-793+
SUGGESTED PCB LAYOUT (PL-430)

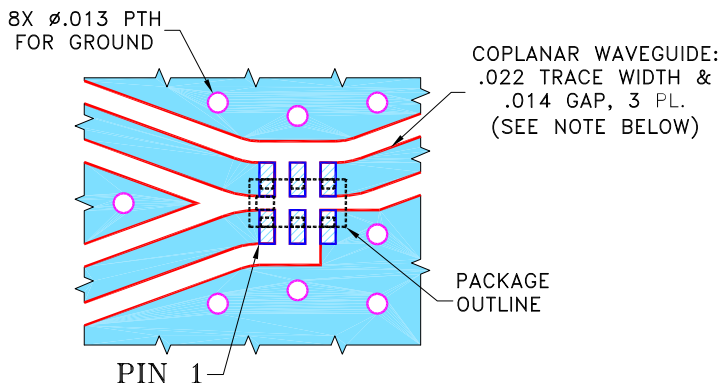


NOTES:


1. COPLANAR WAVEGUIDE IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS .010" ± .001". COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH AND GAP MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER).
- DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK.

OUTLINE DRAWING

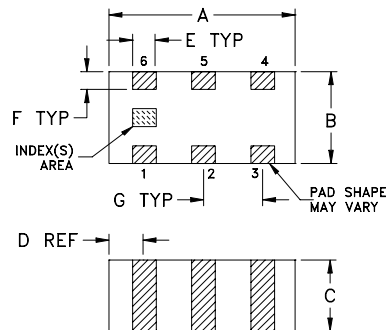

PCB Land Pattern



Suggested Layout,
Tolerance to be within ±.002

OUTLINE DIMENSIONS (Inches/mm)


A	B	C	D	E	F
.063	.031	.024	.012	.008	.006
1.60	0.79	0.61	0.30	0.20	0.15
G	H	J	K	wt	
.020	.010	.022	.053	grams	
0.51	0.25	0.56	1.35	0.005	

TAPE & REEL INFORMATION: F114

Mini-Circuits®




www.minicircuits.com P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

PAGE 2 OF 3

TYPICAL PERFORMANCE DATA⁴

Frequency (MHz)	Insertion Loss (dB)	Return Loss (dB)	Amplitude Unbalance (dB)	Phase Unbalance (deg)
2100	1.21	12.69	0.40	10.88
2200	1.15	13.35	0.28	8.73
2300	1.13	13.65	0.20	6.32
2400	1.14	13.52	0.10	3.73
2475	1.16	13.17	0.06	1.68
2500	1.17	13.01	0.04	0.97
2550	1.20	12.68	0.01	0.35
2575	1.22	12.51	0.01	1.01
2600	1.24	12.32	0.01	1.64
2700	1.34	11.34	0.04	4.47

4. Measured with Agilent E5071B network analyzer using impedance conversion and port extension.

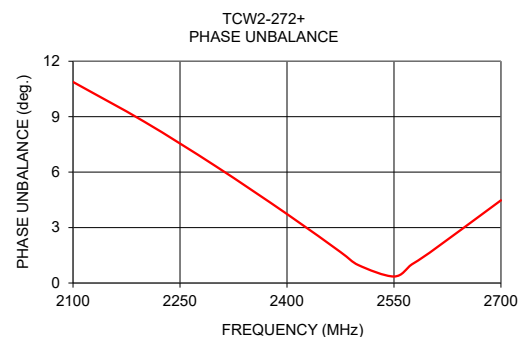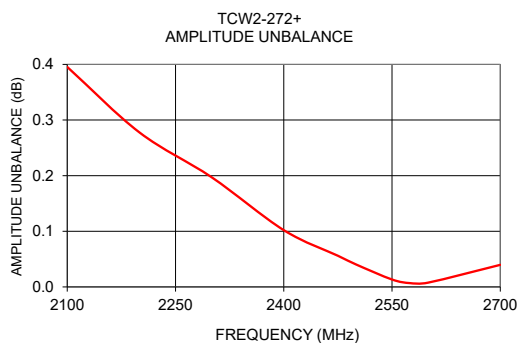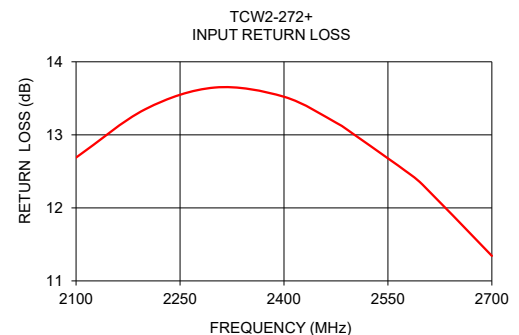

NOTES

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the standard. Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/terms/viewterm.html





Typical Performance Data

FREQUENCY (MHz)	INSERTION LOSS* (dB)	INPUT RETURN LOSS (dB)	AMPLITUDE UNBALANCE (dB)	PHASE UNBALANCE** (deg)
1500	3.07	5.01	1.49	14.66
1600	2.46	6.27	1.20	15.22
1700	2.00	7.61	0.95	15.31
1800	1.68	9.03	0.79	14.93
1900	1.46	10.40	0.63	14.05
2000	1.30	11.66	0.51	12.65
2050	1.25	12.20	0.45	11.81
2100	1.21	12.69	0.40	10.88
2120	1.21	12.69	0.40	10.88
2140	1.21	12.69	0.40	10.88
2160	1.18	13.07	0.34	9.79
2180	1.18	13.07	0.34	9.79
2200	1.15	13.35	0.28	8.73
2220	1.15	13.35	0.28	8.73
2240	1.15	13.35	0.28	8.73
2260	1.14	13.56	0.23	7.63
2280	1.14	13.56	0.23	7.63
2300	1.13	13.65	0.20	6.32
2320	1.13	13.65	0.17	5.79
2340	1.13	13.63	0.15	5.26
2360	1.13	13.61	0.13	4.76
2380	1.13	13.57	0.12	4.25
2400	1.14	13.52	0.10	3.73
2410	1.14	13.49	0.09	3.49
2420	1.14	13.45	0.09	3.22
2430	1.14	13.41	0.08	2.94
2440	1.15	13.37	0.08	2.69
2450	1.15	13.32	0.07	2.39
2460	1.16	13.26	0.07	2.11
2470	1.16	13.20	0.06	1.82
2480	1.17	13.14	0.05	1.54
2490	1.17	13.07	0.05	1.26
2500	1.17	13.01	0.04	0.97
2500	1.17	13.01	0.04	0.97
2520	1.19	12.87	0.03	0.43
2540	1.20	12.74	0.02	0.10
2560	1.21	12.61	0.01	0.61
2580	1.22	12.47	0.01	1.12
2600	1.24	12.32	0.01	1.64
2620	1.24	12.32	0.01	1.64
2640	1.24	12.32	0.01	1.64
2660	1.24	12.32	0.01	1.64
2680	1.24	12.32	0.01	1.64
2700	1.34	11.34	0.04	4.47
2750	1.34	11.34	0.04	4.47
2800	1.47	10.43	0.14	7.21
2850	1.47	10.43	0.14	7.21
2900	1.63	9.50	0.30	9.98
2950	1.63	9.50	0.30	9.98
3000	1.83	8.60	0.62	12.85

* Reference Demo Board TB-793+


**Phase Unbalance is relative to 180°

Typical Performance Data

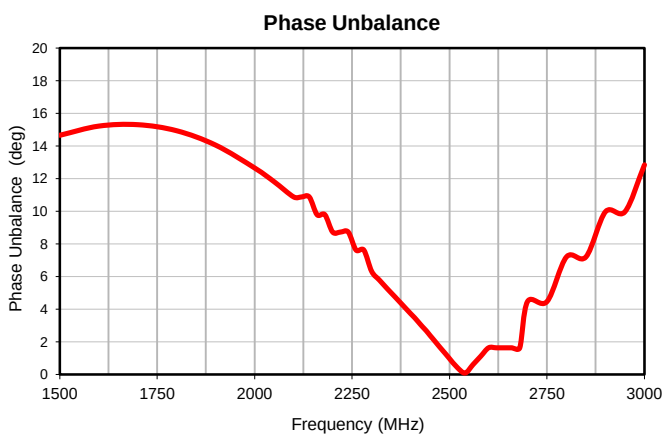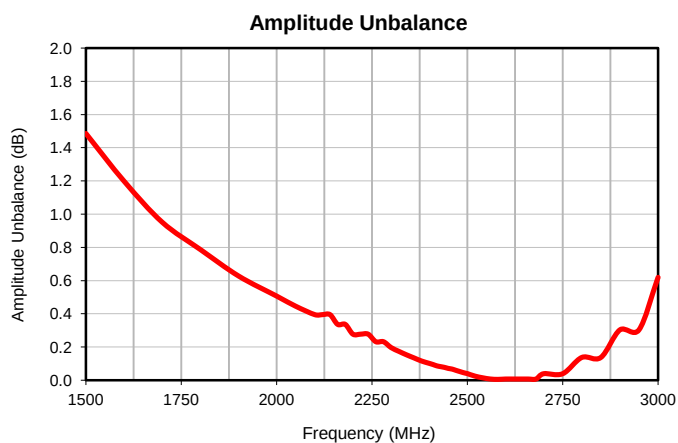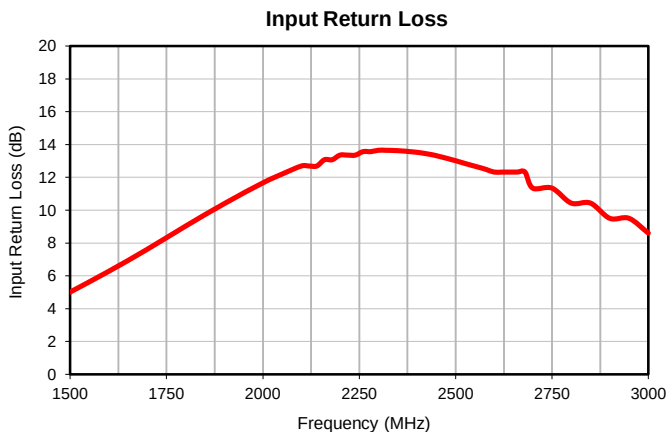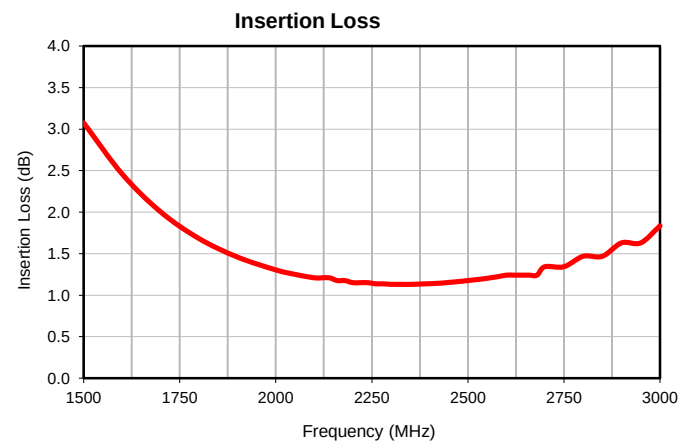


Outline Dimensions

JC0603C

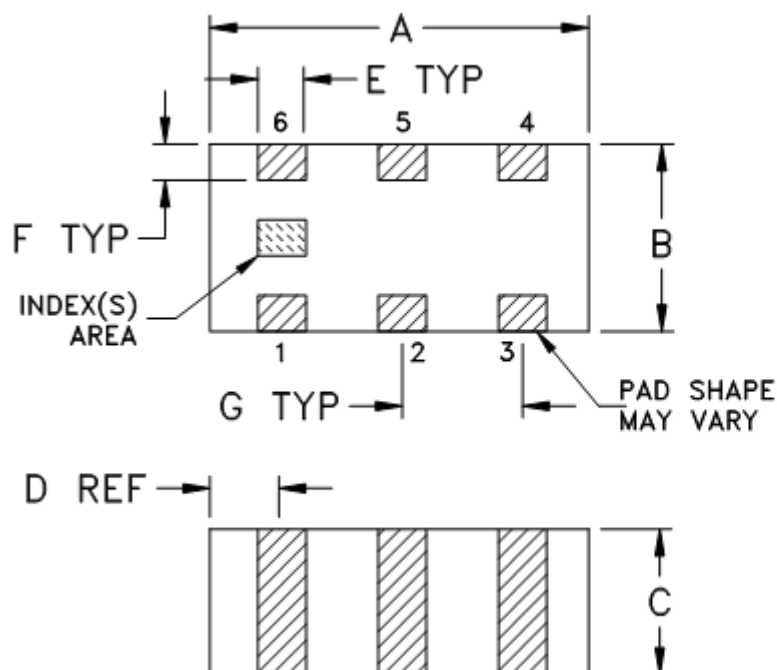

PCB Land Pattern

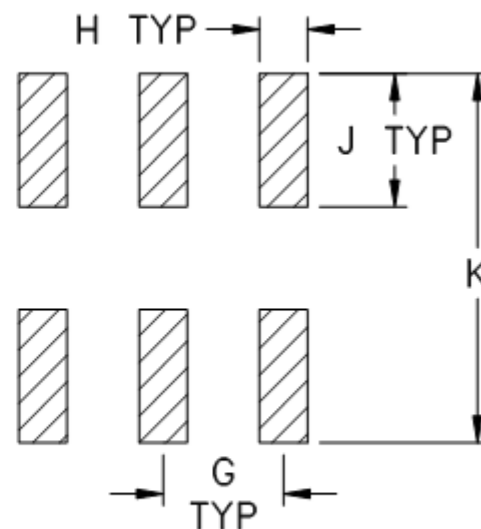

Suggested Layout,
Tolerance to be within $\pm .002$

CASE #	A	B	C	D	E	F	G	H	J	K	WT. GRAM
JC0603C	.063 (1.60)	.031 (0.80)	.024 (0.60)	.012 (0.30)	.008 (0.20)	.006 (0.15)	.020 (0.50)	.010 (0.25)	.022 (0.55)	0.053 (1.35)	.005

Dimensions are in inches (mm). Tolerances: 2 Pl. $\pm .01$; 3 Pl. $\pm .005$

Notes:

- Open style, ceramic base.
- Termination finish:
For RoHS Case Styles: Tin plate over Nickel plate. All models, (+) suffix.



P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site



The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com

RF/IF MICROWAVE COMPONENTS

Tape & Reel Packaging TR-F114

DEVICE ORIENTATION IN T&R

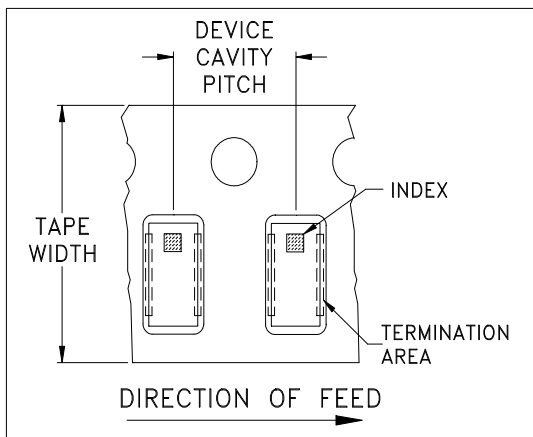


ILLUSTRATION 1

Applicable Case Styles	
GE0805C	JC0603C
GE0805C-1	JC0603C-4
GE0805C-1AP	JC0603C-6
GE0805C-7	
GE0805C-9	
GE0805C-10	
GE0805C-11	
GE0805C-12	

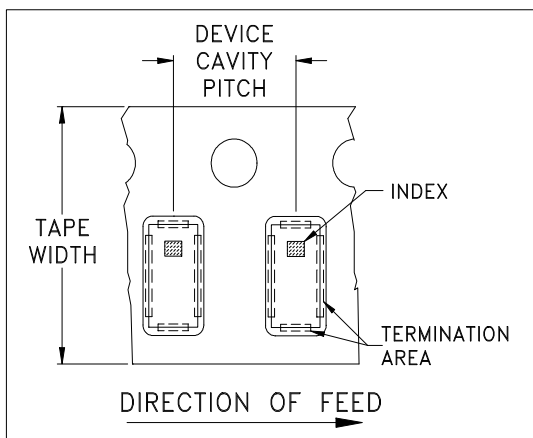


ILLUSTRATION 2

Applicable Case Styles	
GE0805C-2	JC0603C-1
GE0805C-3	JC0603C-2
GE0805C-4	JC0603C-3
GE0805C-5	JC0603C-5
GE0805C-6	JC0603C-7
GE0805C-8	JV1210C-1
GE0805C-15	

Tape Width, mm	Device Cavity Pitch, mm	Reel Size, inches	Devices per Reel	
8	4	7	Small quantity standards (see note)	20
				50
				100
				200
				500
				1000
			Standard	4000

Note: Please Consult individual model data sheet to determine device per reel availability.

Mini-Circuits carrier tape materials provide protection from ESD (Electro-Static Discharge) during handling and transportation. Tapes are static dissipative and comply with industry standards EIA-481/EIA-541.

Go to: www.minicircuits.com/pages/pdfs/tape.pdf




INTERNET <http://www.minicircuits.com>

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

Mini-Circuits ISO 9001 & ISO 14001 Certified

THIRD ANGLE PROJECTION




REVISIONS

REV	ECN No.	DESCRIPTION	DATE	DR	AUTH
OR	M148526	NEW RELEASE	10/09/14	GF	MY

SUGGESTED MOUNTING CONFIGURATION
FOR JC0603C CASE STYLE, "06TJ06" PIN CODE


8X $\varnothing.013$ PTH
FOR GROUND

COPLANAR WAVEGUIDE:
.022 TRACE WIDTH &
.014 GAP, 3 PL.
(SEE NOTE BELOW)

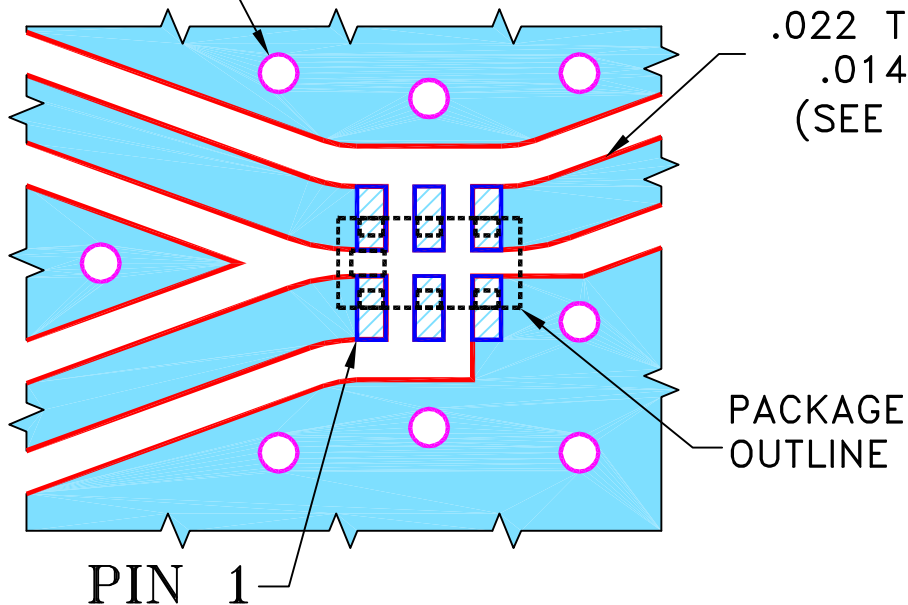NOTES:

1. COPLANAR WAVEGUIDE IS SHOWN FOR ROGERS R04350B WITH DIELECTRIC THICKNESS .010" $\pm$.001". COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH AND GAP MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

 DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER).

 DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK.

UNLESS OTHERWISE SPECIFIED

DIMENSIONS ARE IN INCHES

TOLERANCES ON:
2 PL DECIMALS $\pm$
3 PL DECIMALS $\pm$.005
ANGLES $\pm$
FRACTIONS $\pm$

INITIALS

DATE

DRAWN	GF	10/08/14
CHECKED	AV	10/09/14
APPROVED	MY	10/09/14



Mini-Circuits®

13 Neptune Avenue
Brooklyn NY 11235

PL, 06TJ06, JC0603C, TB-793+

THIS DOCUMENT AND ITS CONTENTS ARE THE PROPERTY OF MINI-CIRCUITS. EXCEPT FOR USE EXPRESSLY GRANTED, IN WRITING, TO ITS VENDORS, VENDEE AND THE UNITED STATES GOVERNMENT, MINI-CIRCUITS RESERVES ALL PROPRIETARY DESIGN, USE, MANUFACTURING AND REPRODUCTION RIGHTS THERETO. THESE CONTENTS SHALL NOT BE USED, DUPLICATED OR DISCLOSED TO ANY OUTSIDE PARTY, IN WHOLE OR IN PART, WITHOUT WRITTEN PERMISSION OF MINI-CIRCUITS.

 Mini-Circuits®

ASHEETA1.DWG REV:A DATE:01/12/95

SIZE
A

CODE IDENT
15542

DRAWING NO:

98-PL-430

REV:

OR


FILE: 98PL430

SCALE: 15:1


SHEET:

1 OF 1

Evaluation Board and Circuit

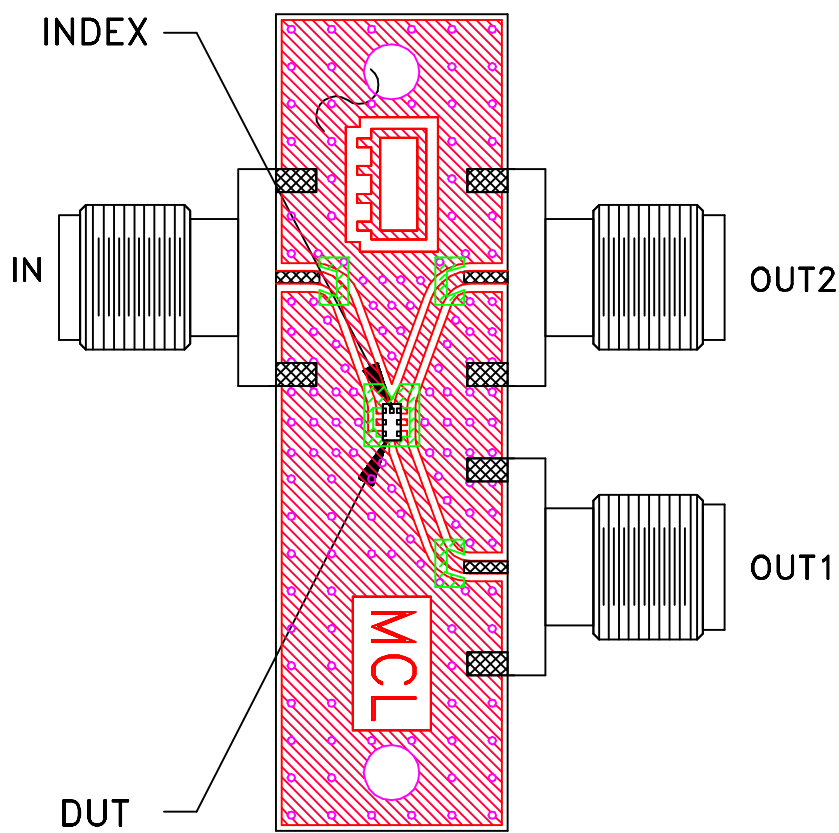

TB-793+

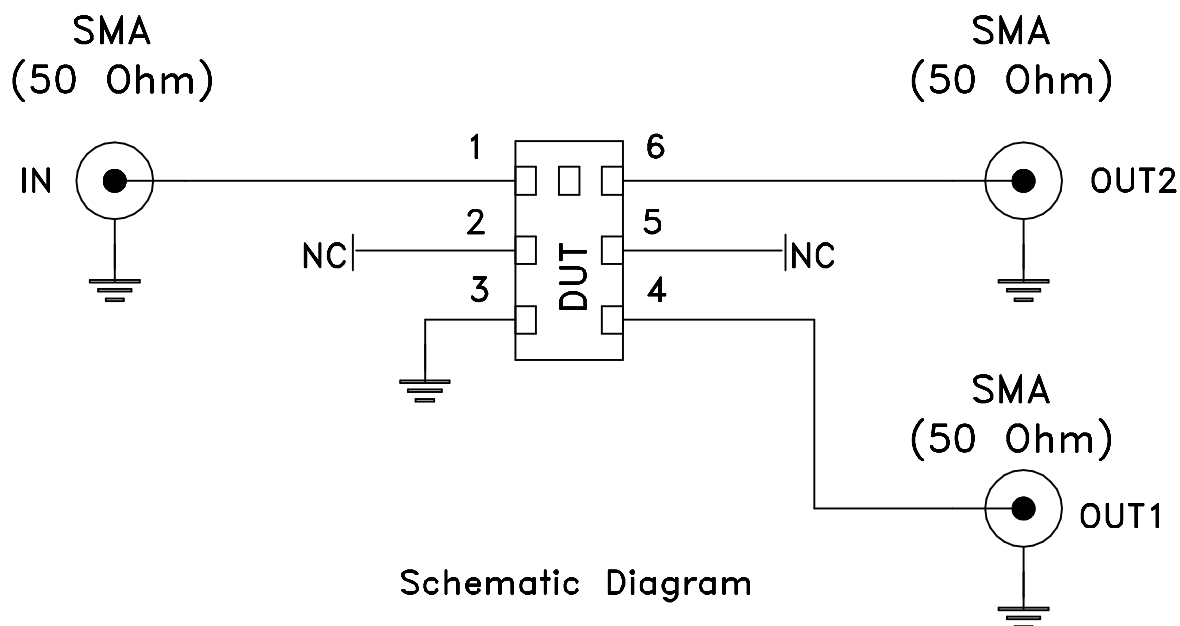

Schematic Diagram

Notes:

1. 50 Ohm SMA Female connectors.
2. PCB Material: R04350 or equivalent,
Dielectric Constant=3.5, Thickness=.010 inch.

 **Mini-Circuits®**



All Mini-Circuits products are manufactured under exacting quality assurance and control standards, and are capable of meeting published specifications after being subjected to any or all of the following physical and environmental test.

Specification	Test/Inspection Condition	Reference/Spec
Operating Temperature	-55° to 100°C Ambient Environment	Individual Model Data Sheet
Storage Temperature	-55° to 100° C Ambient Environment	Individual Model Data Sheet
Humidity	90 to 95% RH, 240 hours, 50°C	MIL-STD-202, Method 103, Condition A, Except 50°C and end-point electrical test done within 12 hours
Solder Reflow Heat	Sn-Pb Eutetic Process: 225°C peak Pb-Free Process 245° - 250°C peak	J-STD-020, Table 4-1, 4-2 and 5-2, Figure 5-1
Solderability	10X Magnification	J-STD-002, Para 4.2.5, Test S, 95% Coverage
Vibration (High Frequency)	20g peak, 10-2000 Hz, 12 times in each of three perpendicular directions (total 36)	MIL-STD-202, Method 204, Condition D
Mechanical Shock	50g, 11 ms, 1/2-sine, 18 shocks: 3 each direction, each of 3 axes	MIL-STD-202, Method 213, Condition A