Surface Mount RF Transformer

50Ω

0.1 to 300 MHz


Maximum Ratings

Operating Temperature	-20°C to 85°C
Storage Temperature	-55°C to 100°C
RF Power	250mW
DC Current	30mA
Permanent demage may ecour if any	of those limits are exceeded

Pin Connections

4
6
3
1
_
2,5

Outline Drawing



0	utline	Dime	ensior	າ ຣ (ˈˈ	i ch)
A	B	C	D	E	F
.30	.27	.23	.010	.042	.020
7.62	6.86	5.84	0.25	1.07	0.51
G	H	J	К	L	wt
. 100	.05	.09	.31	.036	grams
2.54	1.27	2.29	7.87	0.91	0.50

Config. C

Features

- wideband, 0.1 to 300 MHz
- excellent return loss
- also available with plug-in (X65) surface mount gull-wing (KK81) leads

Applications

- VHF/UHF
- receivers/transmitters
- impedance matching





Generic photo used for illustration purposes only CASE STYLE: W38

+RoHS Compliant The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications


Transformer Electrical Specifications

Ω RATIO (Secondary/Primary)	FREQUENCY (MHz)		INSERTION LOSS*		
		3 dB MHz	2 dB MHz	1 dB MHz	
1.5	0.1-300	0.1-300	0.2-150	0.5-80	

* Insertion Loss is referenced to mid-band loss, 0.4 dB typ.

Typical Performance Data

FREQUENCY (MHz)	INSERTION LOSS (dB)	INPUT R. LOSS (dB)	
0.10	1.96	6.70	
0.85	0.64	19.19	
4.00	0.38	23.71	
18.93	0.36	24.68	
53.35	0.42	22.20	
99.34	0.61	18.74	
175.64	0.89	14.16	
223.68	0.96	11.88	
261.29	1.03	10.26	
300.00	1.19	8.75	

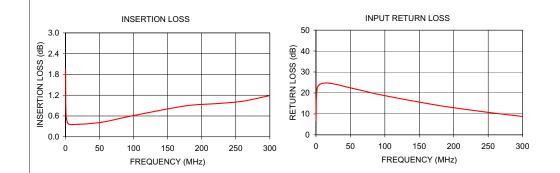

A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
C. The parts covered by this specification document are subject to Mini-Circuit standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp