

Coaxial

High Power Amplifier

HPA-25W-63+

50Ω 25W 700 to 6000 MHz

The Big Deal

- High output power at saturation, 25W typ.
- High gain, 53 dB typ.
- Rugged 3U rack mount case style with internal fans
- Operates from AC line power: 85-264V
- Built-in over-temperature protection



CASE STYLE: NG1942

Product Overview

The HPA-25W-63+ is a high power, rack mount amplifier with a self-contained AC power supply which can be used for a wide variety of laboratory testing applications. This rugged amplifier is capable of amplifying signals up to 25W output power over its entire operating bandwidth of 700 – 6000 MHz. Built-in safety features include fans alarms and automatic shut down mechanism to prevent damage in the event of excessive internal temperatures. The amplifier's output stage is further protected in the event of a fault condition, allowing high power operation for up to 5 minutes into an open or short load (refer to the maximum input power specifications).

Key Features

Feature	Advantages
Wideband frequency range	700 – 6000 MHz bandwidth covers popular wireless communications, SATCOM and radar bands in a single instrument, useful for many test applications.
25W output power at saturation	Supports high power test applications such as EMI, max power handling, and reliability testing
High Gain	53 dB typical gain allows the HPA-25W-63+ to be driven to full output power with nearly all commercially available signal generators
High Reverse Isolation	Insulates load reflections to protect sensitive signal sources from potential damage and performance variation due to load pulling
A/C Power	Operating from standard AC line power supply - the HPA-25W-63+ can be powered from 85-264V at 47-63 Hz making this HPA versatile in supporting global markets
Cooling system	Front to back forced air cooling fans makes this ideal for usage in test equipment racks.
Built-in protections	The unit shuts OFF when the internal amplifier reaches a set temperature of 85±5°C, preventing damage to the amplifier and providing added reliability.
CE marked	Meets conformity standards for sale within the European Economic Area (EEA).



Coaxial High Power Amplifier

HPA-25W-63+

50Ω 25W 700 to 6000 MHz

Features

- High output power at saturation, 25W typ.
- High gain, 53 dB typ.
- Rugged 3U rack mount case style with internal fans
- Operates from AC line power: 85-264V
- Built-in over-temperature protection
- CE marked

Applications

- Laboratory test instrument
- RF Power stress test
- EMI and antenna testing
- Reliability testing



CASE STYLE: NG1942

Model No.	Description
HPA-25W-63+	High Power Amplifier w/ N-Type Connectors

Included Accessories

CBL-3W-XX	AC Power Cord
-----------	---------------

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Electrical Specifications at 25°C

Parameter	Condition	Min.	Typ.	Max.	Units
Frequency Range		700	—	6000	MHz
Gain	700 - 6000 MHz	44	53	62	dB
Gain Flatness	700 - 6000 MHz	—	±4.0	±5.0	dB
Output Power at 1dB compression ¹	700 - 6000 MHz	—	+37	—	dBm
Saturated Output Power ¹	700 - 6000 MHz	+43	+44	—	dBm
Noise Figure	700 - 6000 MHz	—	13	16	dB
Output third order intercept point	700 - 6000 MHz	+39	+45	—	dBm
Input VSWR	700 - 6000 MHz	—	1.8	2.9	:1
Output VSWR	700 - 6000 MHz	—	2.0	3.2	:1
Line Supply	47-63 Hz		85/264		V
Power Consumption	110/220V	—	400	600	W

1. Power measured of fundamental tone only. Does not include power contribution of harmonics signals.

Maximum Ratings²

Parameter	Ratings
Operating Temperature	0°C to 50°C
Storage Temperature	-20°C to 70°C
Input RF Power (no damage)	+5 dBm

2. Specifications apply to CW signals only permanent damage may occur if any of these limits are exceeded.


D-Sub Male Connector Pin Functions (Front Panel)

Pin #	Function	TTL Logic Level	
		Low	High
1	Temperature Alarm	Normal	Alarm Shutdown
2	Fan Alarm	Normal	Fault
3	Ground	—	—
4-9	No connection	—	—

LED Indicators (Front Panel)

Name	Color	LED State	
		Off	On
Power	Green	Power off	Power on
Temp	Red	Normal	Alarm Shutdown
Fan	Red	Normal	Fault

Outline Drawing

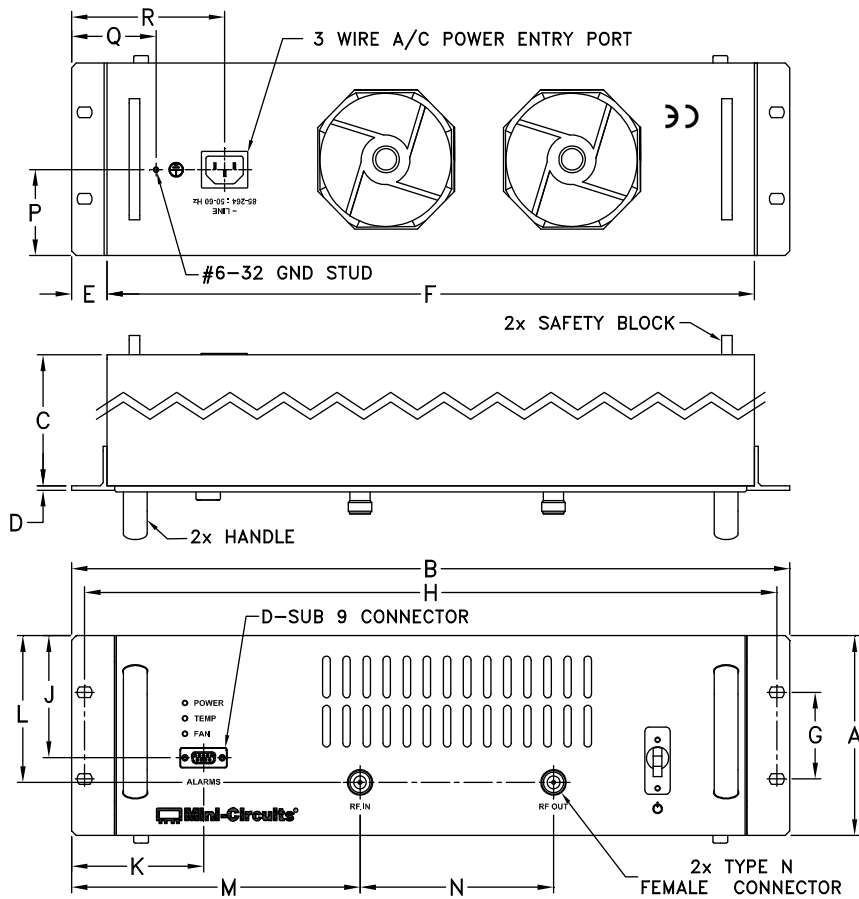

Outline Dimensions (inch mm)

A	B	C	D	E	F	G	H	J	K	L	M	N	P	Q	R	wt
5.20	19.0	20.0	.13	.94	17.13	2.25	18.31	3.17	3.49	3.82	7.63	5.12	2.23	2.24	4.05	grams
132.08	482.60	508.00	3.30	23.88	435.10	57.15	465.07	80.52	88.65	97.03	193.80	130.05	56.64	56.90	102.87	13610.0

Ordering, Pricing & Availability Information see our web site







Model	Description
HPA-25W-63+	Rack Mount High Power Amplifier

Included Accessories	Description
CBL-3W-XX	AC Power Cord (Select one power cord from below with each Rack Mount HPA)

AC Power Cords	Description
CBL-3W-US	US Power Cord
CBL-3W-EU	EU Power Cord
CBL-3W-UK	UK Power Cord



FREQUENCY (MHz)	GAIN (dB)	DIRECTIVITY (dB)	VSWR (:1)		POUT at 1 dB COMPR. (dBm)	POUT at Saturation (dBm)	NOISE FIGURE (dB)	IP3 (dBm)
	24V	24V	IN	OUT	24V	24V	24V	24V
700	54.2	38.0	1.6	1.4	36.3	46.5	13.0	53.5
1000	55.2	34.0	1.6	1.1	39.6	47.8	12.7	53.9
2000	50.1	39.0	1.4	1.6	38.5	44.6	12.7	49.3
3000	53.6	42.0	1.2	1.8	40.0	45.0	12.7	49.2
4000	50.4	36.0	1.4	1.4	38.2	43.8	13.0	47.9
5000	46.7	46.0	1.3	1.3	40.1	45.7	13.6	48.8
6000	47.4	47.0	1.1	1.5	39.4	43.6	14.8	45.0

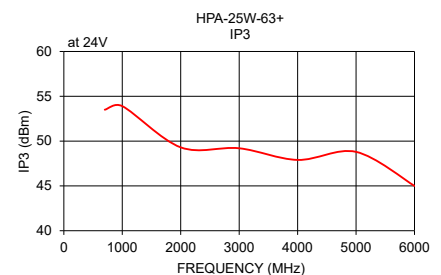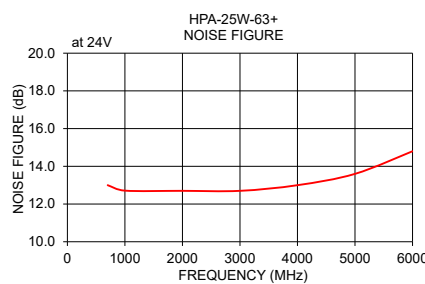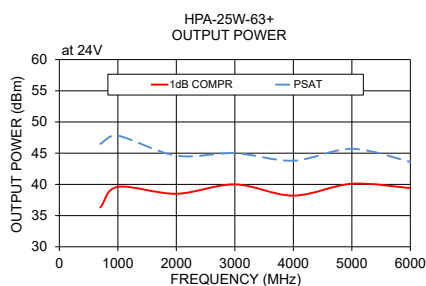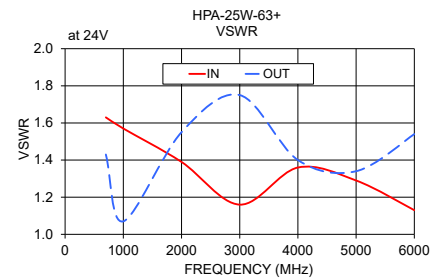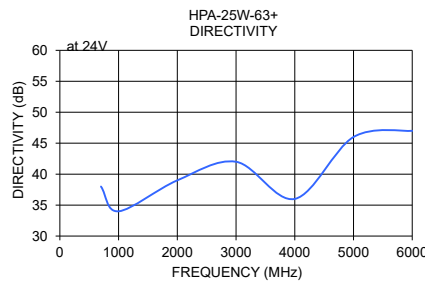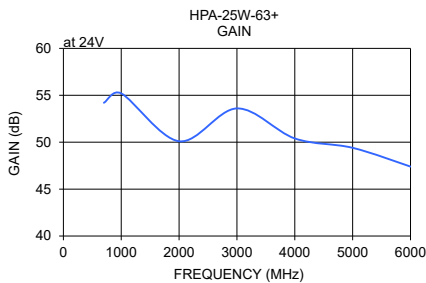

Additional Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp