

# Plug-In Switch

50Ω SPDT Pin Diode, Reflective TTL Driver, 10 to 3000 MHz

## TOSW-230+



Generic photo used for illustration purposes only

CASE STYLE: QQ96

**+RoHS Compliant**

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

### Maximum Ratings


Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
Power	L(+20 dBm), M(+28 dBm), U(+30 dBm)
Supply V	+6V max.

Permanent damage may occur if any of these limits are exceeded.

### Pin Connections

RF IN (COM)	8
RF OUT 1	5
RF OUT 2	11
TTL IN	3
+5V	1
GROUND	2,4,6,7,9,10,12
CASE GROUND	2,4,6,7,9,10,12

### Outline Drawing

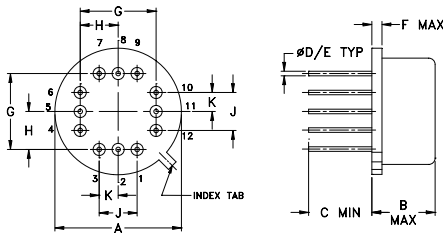

### Outline Dimensions (inch/mm)

A	B	C	D	E	F
.600	.250	.25	.016	.020	.04
15.24	6.35	6.35	0.41	0.51	1.02
G	H	J	K		wt
.400	.200	.200	.100		grams
10.16	5.08	5.08	2.54		4.0

### Features

- wideband, 10 to 3000 MHz
- hermetic, compact TO-8 can
- high isolation, 40 dB typ.

### Applications

- military, hi-rel applications
- antenna switching
- satellite communication

### Switch Electrical Specifications

MODEL NO.	FREQ. (MHz)		INSERTION LOSS (dB)				IN-OUT ISOLATION (dB)					
	$f_L$	$f_U$	Low band lw		Upper band U		L		Frequency Band M		U	
			Typ.	Max.	Typ.	Max.	Typ.	Min.	Typ.	Min.	Typ.	Min.
TOSW-230+	10	3000	1.3	1.9	1.8	2.7	60	40	40	28	35	22

L= low range( $f_L$  to  $10 f_L$ )


M=mid range( $10 f_L$  to  $f_U/2$ )  
lw=low band ( $f_L$  to  $f_U/2$ )

U=upper range ( $f_U/2$  to  $f_U$ )

### Additional Specifications

VSWR ("ON" STATE)	1.3 Typ., 1.9 Max.
SWITCHING TIME (μSEC)	2.0 Typ., 4.0 Max.
SUPPLY VOLTAGE	+5V
SUPPLY CURRENT	10 mA Max.
TTL INPUT HIGH THRESHOLD	2V Min.
TTL INPUT LOW THRESHOLD	0.8V Max.
1 dB COMPRESSION	10 to 100 MHz Above 100 MHz
	+6 increasing to +19 dBm +19 dBm min

### Control Logic

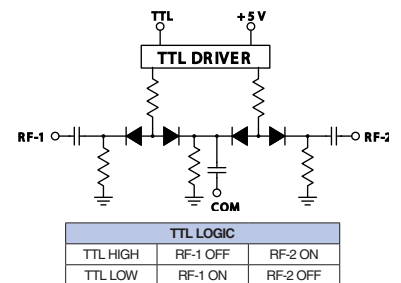

### Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuit's standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuit's website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)






[www.minicircuits.com](http://www.minicircuits.com) P.O. Box 350166, Brooklyn, NY 11235-0003 (718) 934-4500 sales@minicircuits.com

REV. B  
M151107  
TOSW-230+  
WP/CP/AM  
200814  
Page 1 of 2

## Typical Performance Data

FREQ. (MHz)	ON INSERTION LOSS (dB) IN-OUT		AMP. UNBALANCE (dB)		OFF ISOLATION (dB) IN-OUT		OFF ISOLA- TION DELTA (dB)		IN	VSWR OUT	OUT (RF1) OFF
	$\bar{X}$	$\sigma$	$\bar{X}$	$\sigma$	$\bar{X}$	$\sigma$	$\bar{X}$	$\sigma$			
10.00	1.18	0.04	0.03	0.02	74.26	1.60	1.14	0.39	1.37	1.41	31.26
20.00	1.06	0.05	0.05	0.05	69.20	1.46	1.45	1.51	1.20	1.22	30.31
50.00	0.92	0.03	0.02	0.01	61.84	1.14	1.60	1.01	1.12	1.12	30.07
100.00	0.88	0.03	0.02	0.01	55.48	0.61	0.75	0.63	1.09	1.10	30.07
200.00	0.88	0.02	0.02	0.01	49.81	0.72	0.64	0.70	1.09	1.09	30.49
500.00	0.94	0.02	0.02	0.01	42.32	0.56	0.53	0.77	1.11	1.11	29.97
552.91	0.94	0.02	0.01	0.01	41.56	0.50	0.61	0.74	1.12	1.10	28.88
792.00	1.02	0.01	0.01	0.01	39.41	0.46	0.68	0.76	1.13	1.12	26.27
1000.00	1.06	0.01	0.01	0.01	37.86	0.40	0.67	0.71	1.12	1.10	24.84
1102.82	1.10	0.01	0.01	0.01	37.96	0.40	0.70	0.73	1.12	1.08	22.83
1341.91	1.16	0.01	0.02	0.01	37.13	0.42	0.94	0.69	1.12	1.06	21.66
1509.27	1.19	0.02	0.02	0.01	36.81	0.45	0.96	0.75	1.14	1.07	20.69
1652.73	1.21	0.01	0.02	0.01	37.32	0.53	0.89	0.79	1.17	1.09	19.92
1891.82	1.27	0.02	0.02	0.02	37.64	0.67	1.82	0.71	1.23	1.14	19.28
2130.91	1.38	0.02	0.02	0.03	38.60	1.13	0.82	0.94	1.27	1.20	24.87
2370.00	1.31	0.02	0.03	0.03	36.48	3.02	2.00	1.04	1.31	1.31	19.46
2609.09	1.50	0.04	0.06	0.03	30.37	2.46	0.49	0.56	1.34	1.37	11.80
2848.18	1.63	0.06	0.04	0.02	27.51	2.19	0.30	0.21	1.28	1.41	10.49
2919.91	1.56	0.04	0.03	0.02	26.87	2.12	0.56	0.28	1.27	1.41	9.46
3000.00	1.58	0.04	0.05	0.03	26.08	2.02	0.86	0.48	1.24	1.35	11.35

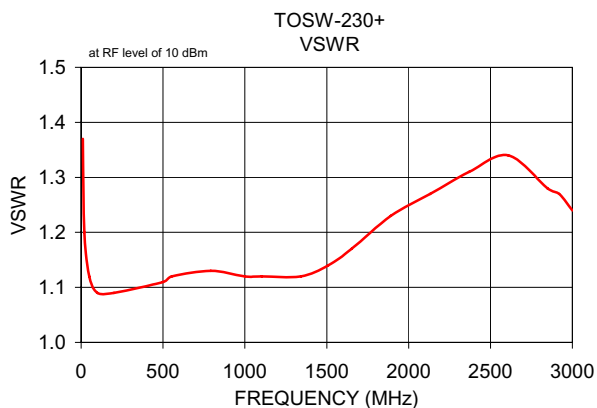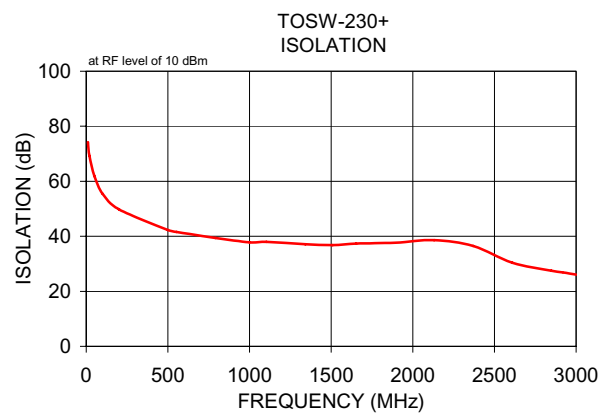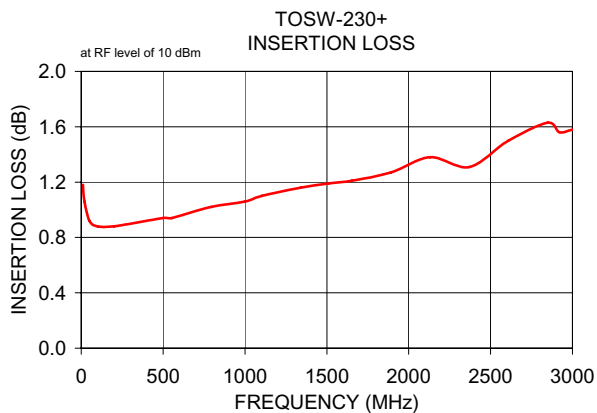

### Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuit's standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuit's website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)

