

Low Pass Filter

50Ω DC to 32 MHz
Maximum Ratings

Operating Temperature -55°C to 100°C

Storage Temperature -55°C to 100°C

RF Power Input 0.5W max.

Permanent damage may occur if any of these limits are exceeded.

Features

- rugged shielded case
- other standard and custom BLP models available with wide selection of fco

Applications

- test equipment
- lab use
- video equipment

BLP-30+


Generic photo used for illustration purposes only

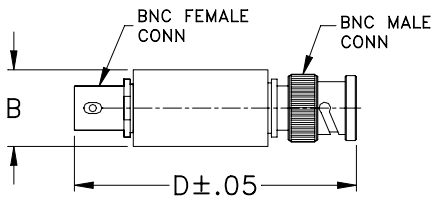
CASE STYLE: FF55

Connectors Model

BNC BLP-30+

+RoHS Compliant



The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Outline Drawing

Outline Dimensions (inch/mm)

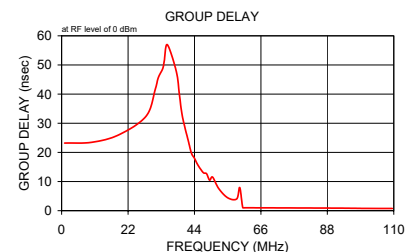
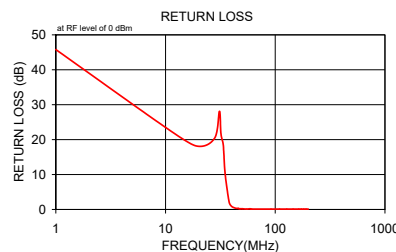
B	D	wt
.57	2.59	grams
14.47	65.79	40.0

Low Pass Filter Electrical Specifications

PASSBAND (MHz)	fco (MHz) Nom.	STOPBAND (MHz)		VSWR (:1)	
(loss < 1 dB)	(loss 3 dB)	(loss > 20 dB)	(loss > 40 dB)	Passband Typ.	Stopband Typ.
DC-32	35	47-61	61-200	1.7	18

typical frequency response

electrical schematic

Typical Performance Data

Frequency (MHz)	Insertion Loss (dB)	Return Loss (dB)	Frequency (MHz)	Group Delay (nsec)
	$\bar{x}$	σ		
1.00	0.07	0.1	1.00	23.20
10.00	0.21	0.1	10.00	23.47
19.00	0.29	0.1	19.00	26.06
28.00	0.37	0.1	28.00	32.45
31.00	0.48	0.1	31.00	41.59
32.00	0.55	0.1	32.00	45.56
33.50	0.62	0.1	33.50	48.79
34.00	0.76	0.1	34.00	51.33
35.00	1.30	0.3	35.00	56.96
38.00	6.09	0.9	38.00	47.73
40.00	10.78	0.9	39.00	39.87
43.00	17.56	0.8	40.00	32.35
45.00	21.65	0.7	42.00	23.79
46.00	23.56	0.7	43.00	19.72
47.00	25.39	0.7	44.00	17.97
48.00	27.19	0.7	45.00	15.87
50.00	30.58	0.6	46.00	14.29
55.00	38.32	0.6	47.00	12.98
59.00	43.69	0.7	48.00	12.68
60.00	45.01	0.7	49.00	10.48
61.00	46.27	0.5	50.00	11.50
91.50	76.88	4.1	52.00	7.62
109.50	80.77	5.3	55.00	4.41
127.50	79.89	2.8	58.00	4.04
145.50	77.20	3.0	59.00	7.93
164.00	74.52	3.4	60.00	1.04
173.00	74.92	3.8	61.00	0.99
182.00	78.05	5.9	91.50	0.88
191.00	79.62	6.8	100.50	0.79
200.00	80.65	6.9	109.50	0.75


Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
 B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
 C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp

