



Monolithic Amplifier

GALI-84+50 Ω DC to 6 GHz

FEATURES

- Frequency Range, DC to 6 GHz
- High Gain, 25.6 dB Typ. at 0.1 GHz
- InGaP HBT Microwave Amplifier
- Miniature SOT-89 Package
- Internally Matched to 50 Ω
- High IP3, +38 dBm Typ.
- High P1dB +21.9 dBm Typ.
- Low Additive Phase Noise, -172 dBc/Hz at 10 KHz Typ.
- Unconditionally Stable
- Transient Protected
- Aqueous Washable
- Protected By US Patent 6,943,629



Generic photo used for illustration purposes only

CASE STYLE: DF782

+RoHS CompliantThe +Suffix identifies RoHS Compliance.
See our website for methodologies and qualifications



APPLICATIONS

- Base Station Infrastructure
- Portable Wireless
- CATV & DBS
- MMDS & Wireless LAN
- Suitable for Low Phase Noise Applications

PRODUCT OVERVIEW

Gali-84+ (RoHS compliant) is a wideband amplifier offering high dynamic range. It has repeatable performance from lot to lot, and is enclosed in a SOT-89 package. It uses patented Transient Protected Darlington configuration and is fabricated using InGaP HBT technology. Expected MTTF is 1,200 years at +85°C case temperature. Gali-84+ is designed to be rugged for ESD and supply switch-on transients.

SIMPLIFIED SCHEMATIC AND PIN DESCRIPTION

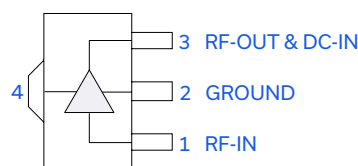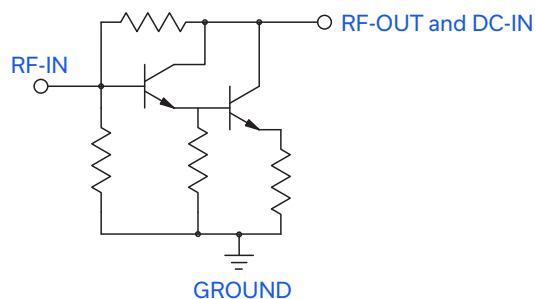

Function	Pin Number	Description
RF-IN	1	RF input pin. This pin requires the use of an external DC blocking capacitor chosen for the frequency of operation.
RF-OUT and DC-IN	3	RF output and bias pin. DC voltage is present on this pin; therefore a DC blocking capacitor is necessary for proper operation. An RF choke is needed to feed DC bias without loss of RF signal due to the bias connection, as shown in "Recommended Application Circuit".
GND	2,4	Connections to ground. Use via holes as shown in "Suggested Layout for PCB Design" to reduce ground path inductance for best performance.



MMIC SURFACE MOUNT

Monolithic Amplifier

GALI-84+

50Ω DC to 6 GHz

ELECTRICAL SPECIFICATIONS AT +25°C AND 100 mA UNLESS NOTED OTHERWISE

Parameter	Conditions (GHz)	Min.	Typ.	Max.	Units	Cpk
Frequency Range ¹		DC		6	GHz	
Gain	0.1	24.3	25.6	26.9	dB	>1.5
	1		22.7			
	2	18.2	19.2	20.2		
	3		16.7			
	4	14.3	15.0	15.8		
	6		11.8			
Magnitude of Gain Variation vs. Temperature (Values Are Negative)	0.1		0.0025	0.0090	dB/°C	
	1		0.0036			
	2		0.0045			
	3		0.0057			
	4		0.0074			
	6		0.0148			
Input Return Loss	0.1	14.0	25.8		dB	
	1		21.2			
	2		18.0			
	3		15.6			
	4		14.7			
	6		16.7			
Output Return Loss	0.1	6.0	16.3		dB	
	1		11.0			
	2		8.9			
	3		9.0			
	4		9.7			
	6		8.4			
Reverse Isolation	2	22	26.5		dB	
Output Power @ 1 dB Compression	0.1	+20.8	+21.9		dBm	>1.5
	1	+20.4	+21.5			
	2	+20.1	+21.2			
	3		+20.9			
	4		+19.2			
	6		+15.5			
Saturated Output Power (at 3 dB Compression)	0.1		+23.0		dBm	
	1		+22.6			
	2		+22.1			
	3		+21.7			
	4		+20.3			
	6		+17.1			

1. Guaranteed specification DC-6 GHz. Low frequency cut off determined by external coupling capacitors.





Monolithic Amplifier

GALI-84+

50Ω DC to 6 GHz

ELECTRICAL SPECIFICATIONS AT +25°C AND 100 mA UNLESS NOTED OTHERWISE

Parameter	Conditions (GHz)	Min.	Typ.	Max.	Units	Cpk
Output IP3	0.1	+33.8	+37.6		dBm	>1.5
	1	+34.0	+37.8			
	2	+34.2	+38.0			
	3		+37.4			
	4		+34.7			
	6		+32.7			
Noise Figure	0.1		4.2		dB	>1.5
	1		4.4			
	2		4.4			
	3		4.4			
	4		4.3			
	6		5.3			
Additive Phase Noise	2 GHz, 10 KHz Offset		-172		dBc/Hz	
Group Delay	2		94		psec	
Recommended Device Operating Current			100		mA	
Device Operating Voltage		+5.4	+5.8	+6.2	V	>1.5
Device Voltage Variation vs. Temperature at 100 mA			-3.6		mV/°C	
Device Voltage Variation vs. Current at +25°C			3.3		mV/mA	
Thermal Resistance, Junction-to-Case ²			64		°C/W	

2. Case is defined as ground leads.

ABSOLUTE MAXIMUM RATINGS

Parameter	Ratings
Operating Temperature ³	-45°C to +85°C
Storage Temperature	-65°C to +150°C
Operating Current	160 mA
Power Dissipation	1 W
Input Power	+13 dBm

3. Based on typical case temperature rise +9°C above ambient.
Permanent damage may occur if any of these limits are exceeded. These ratings are not intended for continuous normal operation.



Mini-Circuits


MMIC SURFACE MOUNT

Monolithic Amplifier

GALI-84+

50Ω DC to 6 GHz


RECOMMENDED APPLICATION CIRCUIT

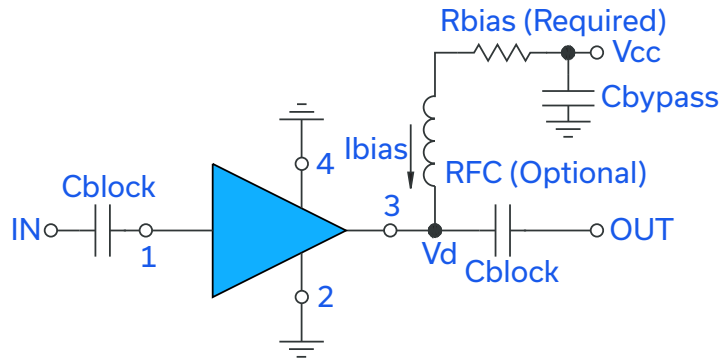

Test Board includes case, connectors, and components (in bold) soldered to PCB

R BIAS	
Vcc	"1%" Res. Values (Ohms) for Optimum Biasing
8	22.1
9	32.4
10	42.2
11	52.3
12	61.9
13	71.5
14	82.5
15	93.1
16	102
17	113
18	121
19	133
20	140

PRODUCT MARKING



Markings in addition to model number designation may appear for internal quality control purposes.





MMIC SURFACE MOUNT

Monolithic Amplifier

GALI-84+

50Ω DC to 6 GHz

ADDITIONAL DETAILED TECHNICAL INFORMATION IS AVAILABLE ON OUR DASHBOARD. [CLICK HERE](#)

Performance Data & Graphs	Data Table
	Swept Graphs
	S-Parameter (S2P Files) Data Set (.zip file)
Case Style	DF782 Plastic package, Lead Finish: Matte-tin
Tape & Reel Standard Quantities Available on Reel	F55 7" Reels with 20, 50, 100, 200, 500 or 1K devices
Suggested Layout for PCB Design	PL019
Evaluation Board	TB-409-84+
Environmental Ratings	ENV08T2

ESD RATING


Human Body Model (HBM): Class 1C (1000 V to < 2000 V) in accordance with ANSI/ESD STM 5.1 - 2001
Machine Model (MM): Class M2 (100 V to < 200 V) in accordance with ANSI/ESD STM 5.2 - 1999

MSL RATING

Moisture Sensitivity: MSL1 in accordance with IPC/JEDECJ-STD-020C

No.	Test Required	Condition	Standard	Quantity
1	Visual Inspection	Low Power Microscope Magnification 40x	MIP-IN-0003 (MCT spec)	45 units
2	Electrical Test	Room Temperature	SCD (MCL spec)	45 units
3	SAM Analysis	Less than 10% growth in term of delamination	J-Std-020C (Jedec Standard)	45 units
4	Moisture Sensitivity Level 1	Bake at 125°C for 24 hours Soak at 85°C/85%RH for 168 hours Reflow 3 cycles at 260°C peak	J-Std-020C (Jedec Standard)	45 units

MSL TEST FLOW CHART

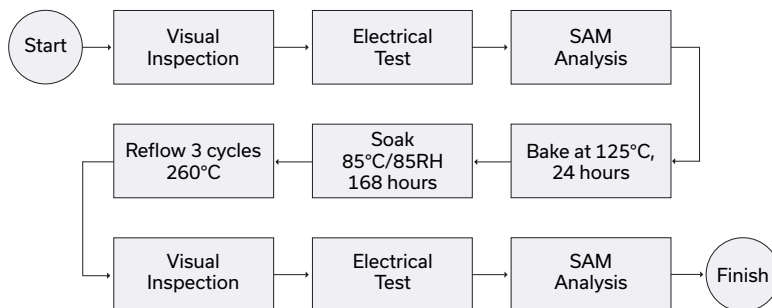

NOTES

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuits' applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits' standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the standard terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/terms/viewterm.html

