



MMIC SURFACE MOUNT

Power Splitter/Combiner


WP4G1+

Mini-Circuits

4 Way-0° 50Ω 1300 to 2000 MHz

FEATURES

- Excellent Isolation, Typ. 26 dB
- Excellent Phase Unbalance, Max. 5 deg.
- Excellent Amplitude Unbalance, Max. 0.5 dB
- Small Size, 3x3 mm
- High ESD Level
- Aqueous Washable



Generic photo used for illustration purposes only

CASE STYLE: DQ1225

+RoHS Compliant

The +Suffix identifies RoHS Compliance. See our website for methodologies and qualifications

APPLICATIONS

- GPS
- PCS
- DCS
- WCDMA

ELECTRICAL SPECIFICATIONS AT +25°C

Parameter	Frequency (MHz)	Min.	Typ.	Max.	Units
Frequency Range		1300		2000	MHz
Insertion Loss* (Above 6.0 dB)	1300-2000		0.8	1.9	dB
Isolation	1300-2000	14	26		dB
Amplitude Unbalance	1300-2000			0.5	dB
Phase Unbalance	1300-2000			5	deg.
VSWR (Port S)	1300-2000		1.5		:1
VSWR (Ports 1,2,3,4)	1300-2000		1.4		:1


* Includes fixture loss, 0.12 dB typ.

ABSOLUTE MAXIMUM RATINGS

Parameter	Ratings
Operating Temperature	-40°C to +85°C
Storage Temperature	-65°C to +150°C
Power Input (as a Splitter)	1.5 W max.
Internal Dissipation	0.375 W max.

Permanent damage may occur if any of these limits are exceeded.

ELECTRICAL SCHEMATIC

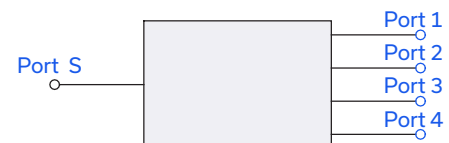

REV. D
ECO-015507
WP4G1+
MCL NY
250109





MMIC SURFACE MOUNT

Power Splitter/Combiner

WP4G1+


Mini-Circuits

4 Way-0° 50Ω 1300 to 2000 MHz

PAD CONNECTIONS

SUM PORT	2
PORT 1	12
PORT 2	10
PORT 3	6
PORT 4	4
GROUND	1,3,5,7,8,9,11, Paddle

DEMO BOARD MCL P/N: TB-WP4G1+ SUGGESTED PCB LAYOUT (PL-259)

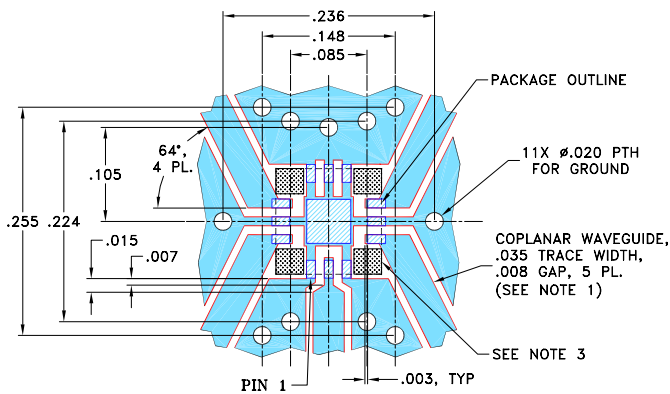


NOTES:


1. TRACE WIDTH IS SHOWN FOR ROGERS R04350B WITH DIELECTRIC THICKNESS .020" ± .0015"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH AND GAP MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
3. SIGNAL TRACES ARE NOT ALLOWED INSIDE HATCHED AREAS (APPROX. .030 X .030) AT 4 PLACES AS SHOWN.

- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
- DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

OUTLINE DRAWING

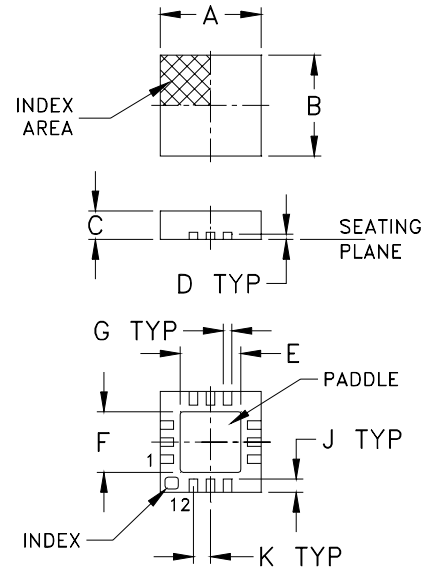


PCB Land Pattern

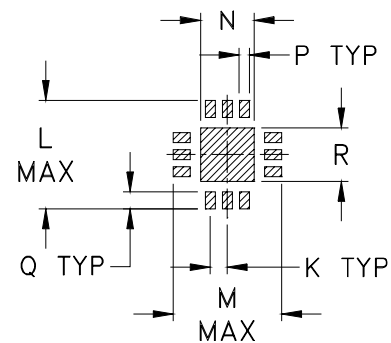

Suggested Layout,
Tolerance to be within ±.002

PRODUCT MARKING

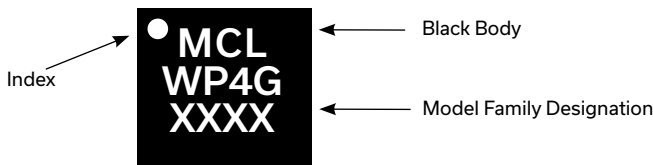

Marking may contain other features or characters for internal lot control.

OUTLINE DIMENSIONS (Inch/mm)

A	B	C	D	E	F	G	H	J
.118	.118	.035	.008	.057	.057	.009	---	.016
3.00	3.00	0.89	0.20	1.45	1.45	0.23	---	0.41
K	L	M	N	P	Q	R		wt
.020	.127	.127	.049	.010	.020	.049		grams
0.51	3.23	3.23	1.24	0.25	0.51	1.24		0.02




TAPE & REEL INFORMATION: F66



TYPICAL PERFORMANCE DATA AND CHARTS

Frequency (MHz)	Total Loss ¹ (dB)				Amplitude Unbalance (dB)	Isolation (dB)			Phase Unbalance (deg.)	VSWR S	VSWR 1	VSWR 2	VSWR 3	VSWR 4
	S-1	S-2	S-3	S-4		1-2	2-3	3-4						
1300.00	7.18	7.31	7.24	7.11	0.20	26.81	23.73	27.28	1.41	1.79	1.58	1.55	1.53	1.54
1360.00	6.94	7.05	6.98	6.86	0.19	30.94	26.53	31.87	1.19	1.53	1.54	1.51	1.49	1.50
1400.00	6.82	6.93	6.86	6.75	0.18	33.52	28.41	34.73	1.03	1.39	1.52	1.48	1.46	1.48
1450.00	6.72	6.82	6.75	6.65	0.17	33.24	29.81	33.68	0.88	1.25	1.49	1.45	1.43	1.45
1500.00	6.66	6.75	6.68	6.59	0.16	30.25	29.21	30.14	0.87	1.16	1.47	1.43	1.41	1.43
1550.00	6.63	6.71	6.64	6.56	0.15	27.52	27.41	27.30	0.92	1.15	1.45	1.41	1.39	1.41
1570.00	6.63	6.70	6.63	6.55	0.15	26.62	26.63	26.39	0.92	1.17	1.45	1.40	1.38	1.41
1580.00	6.63	6.70	6.63	6.55	0.14	26.21	26.25	25.97	0.93	1.18	1.44	1.39	1.37	1.41
1590.00	6.62	6.69	6.62	6.55	0.14	25.82	25.89	25.57	0.93	1.20	1.44	1.39	1.37	1.40
1600.00	6.63	6.69	6.62	6.55	0.14	25.45	25.52	25.20	0.95	1.21	1.44	1.39	1.36	1.40
1650.00	6.64	6.70	6.63	6.57	0.13	23.85	23.90	23.60	1.14	1.29	1.43	1.37	1.35	1.39
1700.00	6.67	6.71	6.65	6.60	0.12	22.59	22.54	22.35	1.36	1.38	1.43	1.36	1.34	1.39
1800.00	6.75	6.77	6.71	6.68	0.09	20.73	20.47	20.50	1.73	1.57	1.42	1.35	1.33	1.39
1900.00	6.85	6.85	6.79	6.78	0.07	19.44	18.96	19.22	2.09	1.74	1.43	1.35	1.32	1.39
2000.00	6.95	6.94	6.87	6.89	0.08	18.50	17.82	18.27	2.40	1.90	1.44	1.35	1.33	1.40

1. Total Loss = Insertion Loss + 6 dB splitter loss.

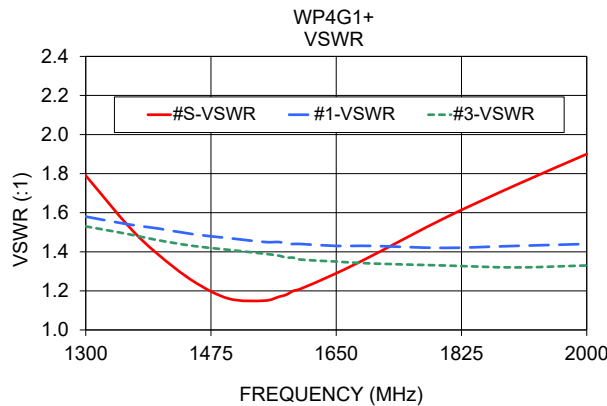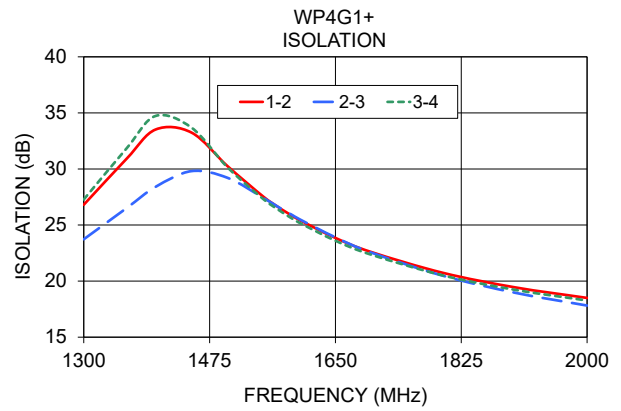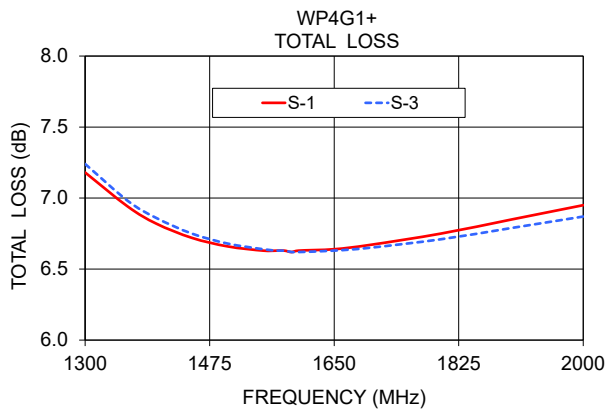

NOTES

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the standard terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/terms/viewterm.html