


Outline Dimensions

LZ1671

PCB Land Pattern

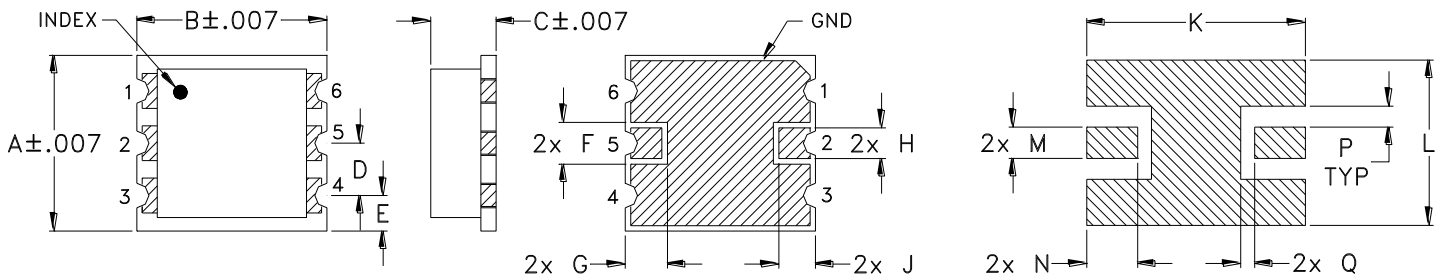

Suggested Layout
Pattern to be within $\nabla .002$

CASE #	A	B	C	D	E	F	G	H	J	K	L	M
LZ1671	.252 (6.40)	.274 (6.96)	.094 (2.40)	.075 (1.91)	.051 (1.30)	.060 (1.53)	.061 (1.55)	.044 (1.12)	.053 (1.35)	.290 (7.37)	.237 (6.02)	.045 (1.14)

CASE #	N	P	Q	R	WT. GRAM
LZ1671	.060 (1.52)	.030 (.76)	.020 (.51)	-	0.20

Dimensions are in inches (mm). Tolerances: 3 Pl. $\pm .003$ unless otherwise specified

Notes:

1. Case material: Ceramic.
2. Base material: 20 mil thk laminate.
3. Termination finish: 3-5 μ inch (0.075-0.125 microns) gold plating over 120-240 μ inch (3-6 microns) low stress electroless nickel.



INTERNET <http://www.minicircuits.com>

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661

Distribution Centers NORTH AMERICA 800-654-7949 • 417-335-5935 • Fax 417-335-5945 • EUROPE 44-1252-832600 • Fax 44-1252-837010

Mini-Circuits ISO 9001 & ISO 14001 Certified