

# Miniature Plastic Fixed Attenuator

## GAT-10+

50Ω 0.5W 10dB DC to 8000 MHz



CASE STYLE: FG873

### Maximum Ratings


Operating Temperature	-45°C to 85°C
Storage Temperature	-55°C to 100°C

Permanent damage may occur if any of these limits are exceeded.


### Pin Connections

INPUT	1
OUTPUT	3
GROUND	2,4

### Product Marking




### Outline Drawing

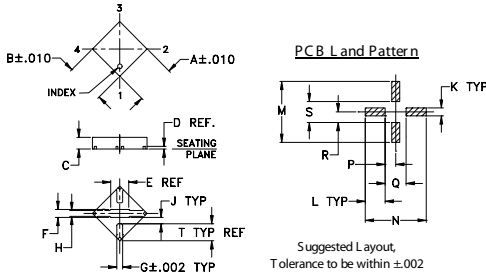

### Outline Dimensions (inch/mm)

A	B	C	D	E	F	G	H	J	K	L	M	N	P	Q	R	S	T	wt
0.118	0.118	0.035	0.008	0.07	0.024	0.017	0.018	0.021										
3.00	3.00	0.89	0.20	1.78	0.61	0.43	0.46	0.53										
0.024	0.061	0.186	0.186	0.032	0.064	0.032	0.064	0.05										grams
0.61	1.55	4.72	4.72	0.81	1.63	0.81	1.63	1.27										0.02

### Demo Board MCL P/N: TB-154 Suggested PCB Layout (PL-126)

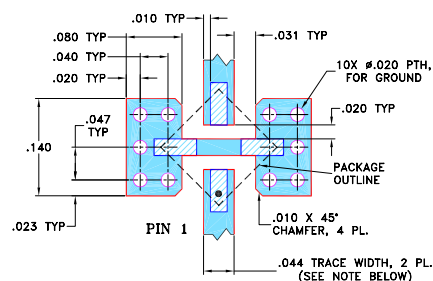

- NOTES:**
- TRACE WIDTH IS SHOWN FOR ROGERS RO4350B WITH DIELECTRIC THICKNESS .020" ± .0015"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
  - BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.
- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
  - DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

### Features

- miniature package MCLP™ 3x3 mm
- specified to 8000 MHz, useable to 10000 MHz
- excellent VSWR, 1:15:1 typ.

### Applications

- cellular
- PCS
- communications
- radar
- defense

**+RoHS Compliant**  
The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

Available Tape and Reel at no extra cost

Reel Size	Devices/Reel
7"	20, 50, 100, 200, 500, 1000
13"	2000, 3000, 4000



### Electrical Specifications at 25°C

FREQ. RANGE (MHz)	ATTENUATION (dB) Flatness	VSWR (:1)						MAX. INPUT POWER <sup>1</sup> (W)		
		DC-1 GHz		1-5 GHz		5-8 GHz				
		Typ.	Max.	Typ.	Max.	Typ.	Max.			
DC-8000	10±0.4	0.15	0.2	0.3	1.05	1.2	1.15	1.3	1.3	0.5

1. RF power at 25°C case temperature: ½Watt. Derate linearly to 0.2 Watt at 85°C.
2. Flatness= variation over band divided by 2

### Typical Performance Data

Frequency (MHz)	Attenuation (dB)	VSWR (:1)
100.00	9.94	1.00
500.00	10.11	1.02
1000.00	10.16	1.02
2000.00	10.25	1.04
3000.00	10.28	1.06
4000.00	10.48	1.09
5000.00	10.60	1.11
6000.00	10.46	1.14
7000.00	11.00	1.19
8000.00	11.08	1.28

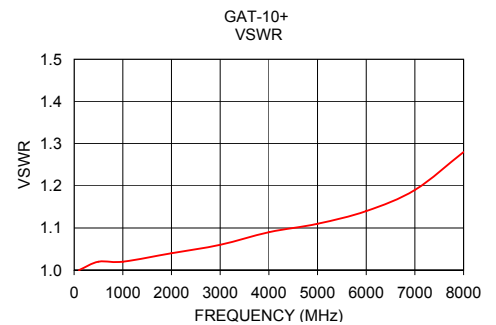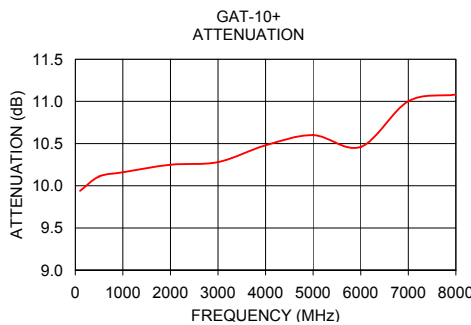

### Notes

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)

