# **Frequency Mixer**

# TUF-3HSM+

## Level 17 (LO Power +17 dBm) 0.15 to 400 MHz

#### **Maximum Ratings**

-55°C to 100°C
-55°C to 100°C
200mW
40mA

Permanent damage may occur if any of these limits are exceeded.

#### **Pin Connections**

LO	4
RF	1
IF	2
GROUND	3
CASE GROUND	3

#### **Features**

- low conversion loss, 5.0 dB typ.
- good IP3, 22 dBm typ.
- excellent L-R isolation, 50 dB typ.; L-I, 45 dB typ.
- rugged welded construction

### **Applications**

- defense & federal communications

Generic photo used for illustration purposes only CASE STYLE: NNN150


+RoHS Compliant


The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications

### • HF/VHF

LO	4
RF	1
IF	2
GROUND	3
CASE GROUND	3

### **Outline Drawing**






#### Outline Dimensions (inch )

G	F	Е	D	С	В	Α
.06	.21	.23	.240	.255	.48	.50
1.52	5.33	5.84	6.10	6.48	12.19	12.70
wt	N	M	L	K	J	Н
grams	.005	.09	.020	.16	.09	.100
10	0.13	2 20	0.51	4.06	2 20	2.54

#### Demo Board MCL PIN: TB-201 Suggested PCB Layout (PL-081)



NOTES: 1.TRACE WIDTH IS SHOWN FOR ROGERS R04350B WITH DIELECTRIC
THICKNESS 0.030" ± 0.002"; COPPER: 1/2 0Z. EACH SIDE.
FOR OTHER MATERIALS TRACE WIDTH MAY NEED
TO BE MODIFIED.
2.BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER
MASK OVER BARE COPPER)

DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

#### **Electrical Specifications**

FREQUENCY (MHz)		CONVERSION LOSS (dB)				LO-F		OLAT B)	ΓΙΟΝ			LO-I	F ISC	DLAT	ION		IP3 @ CENTER BAND (dBm)	
LO/RF	IF	N	1id-Bar m	nd	Total Range	ı	L	N	Л	ι	J	ı	_	N	Л	ι	J	
f <sub>L</sub> -f <sub>U</sub>		X	σ	Max.	Max.	Тур.	Min.	Тур.	Min.	Тур.	Min.	Тур.	Min.	Тур.	Min.	Тур.	Min.	Тур.
0.15-400	DC-400	5.00	0.33	7.0	8.0	60	50	50	35	40	30	60	40	45	25	35	20	22

1 dB COMP.: +14 dBm typ. E = [IP3 (dBm)-LO Power (dBm)]/10  $L = low range [f_i to 10 f_i]$ 


M = mid range [10  $f_1$  to  $f_1/2$ ] U = upper range [ $f_1/2$  to  $f_1$ ]

m= mid band  $[2f_i \text{ to } f_i/2]$ 

#### **Typical Performance Data**

Freq (M	uency  Hz)	Conversion Loss (dB)	VSWR RF Port (:1)	Frequency (MHz)	Isolation L-R (dB)	Isolation L-I (dB)	VSWR LO Port (:1)
RF	LO	LO +17dBm	LO +17dBm	LO	LO +17dBm	LO +17dBm	LO +17dBm
0.15 0.30 0.50 0.75 1.00 2.80 10.00 20.00 38.00 110.00 128.00 144.00 200.00 250.00 300.00 325.00	30.15 30.30 30.50 30.75 31.00 32.80 40.00 50.00 68.00 140.00 158.00 194.00 230.00 280.00 355.00 380.00	5.73 5.50 5.40 5.32 5.29 5.15 5.07 5.01 4.98 4.96 5.08 5.07 5.10 5.24 5.41	1.50 1.42 1.41 1.41 1.41 1.42 1.36 1.35 1.29 1.26 1.25 1.19 1.16 1.11	10.00 20.00 40.00 50.00 68.00 86.00 104.00 122.00 140.00 212.00 230.00 255.00 280.00 305.00 330.00 355.00 380.00	82.56 77.94 73.33 71.91 70.74 70.55 68.91 69.27 65.14 69.38 58.50 54.52 55.28 56.41 51.98 48.01 49.07 53.89	73.10 72.84 71.28 69.09 64.21 58.19 54.46 51.05 48.62 45.57 42.60 41.38 41.47 41.92 40.69 38.86 36.77 34.86	1.50 1.49 1.46 1.49 1.48 1.45 1.47 1.48 1.50 1.52 1.55 1.56 1.61 1.60 1.64
375.00 400.00	405.00 430.00	5.63 6.10	1.15 1.28	405.00 430.00	51.11 47.28	33.11 33.20	1.90 1.89


#### **Electrical Schematic**



- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.

  B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.

  C. The parts covered by this specification document are subject to Mini-Circuit's standard limited warranty and terms and conditions (collectively, "Standard Terms"). Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp

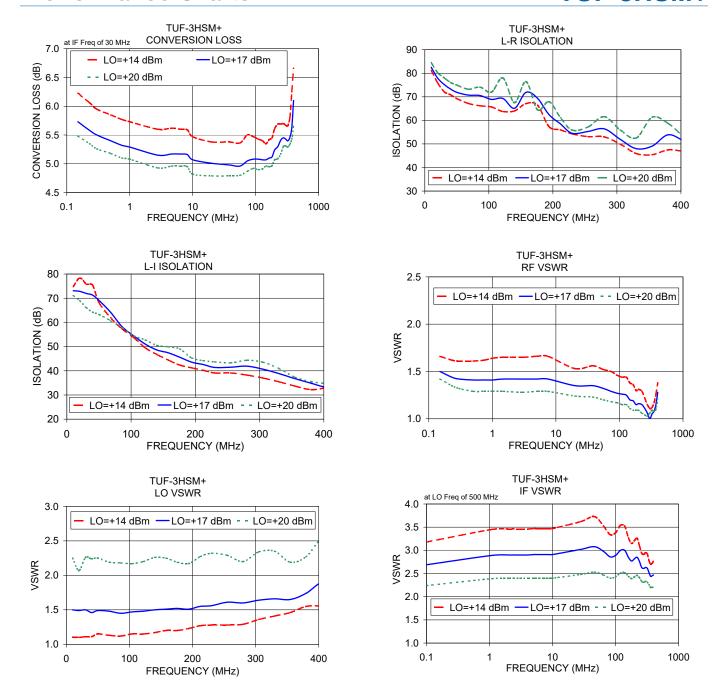

A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.

B. Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.

C. The parts covered by this specification document are subject to Mini-Circuits standard limited warrantly and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCJStore/terms.jsp