



Mini-Circuits®

COAXIAL

Fixed Attenuator

VAT-5W2+

50Ω 2 W 5 dB DC to 6 GHz SMA Female

FEATURES

- Wideband coverage, DC to 6 GHz
- 2 Watt Rating
- Rugged Unibody Construction
- Off-The-Shelf Availability
- Very Low Cost

APPLICATIONS

- Impedance Matching
- Signal Level Adjustment



Generic photo used for illustration purposes only

Model No.	VAT-5W2+
Case Style	DC1066
Connectors	SMA Female

+RoHS Compliant

The +Suffix identifies RoHS Compliance.
See our website for methodologies and qualifications

ELECTRICAL SPECIFICATIONS AT +25°C

Parameter	Frequency (GHz)	Min.	Typ.	Max.	Unit
Frequency Range		DC		6	GHz
Attenuation, Nominal			5±0.3		dB
Attenuation ¹ , Flatness ²	DC - 3		0.20		dB
	3 - 5		0.10		
	5 - 6		0.15		
	DC - 6		0.35		
VSWR	DC - 3		1.10	1.20	:1
	3 - 5		1.40	1.50	
	5 - 6		1.65		
Input Power				2.0	W

1. Attenuation varies by 0.3 dB max. over temperature.

2. Flatness = variation over band divided by 2.

ABSOLUTE MAXIMUM RATINGS

Parameter	Ratings
Operating Temperature	-45°C to +100°C
Storage Temperature	-55°C to +100°C

Permanent damage may occur if any of these limits are exceeded.

REV. E
ECO-024278
VAT-5W2+
MCL NY
250122





Mini-Circuits


COAXIAL

Fixed Attenuator

VAT-5W2+

50Ω 2 W 5 dB DC to 6 GHz SMA Female

OUTLINE DRAWING

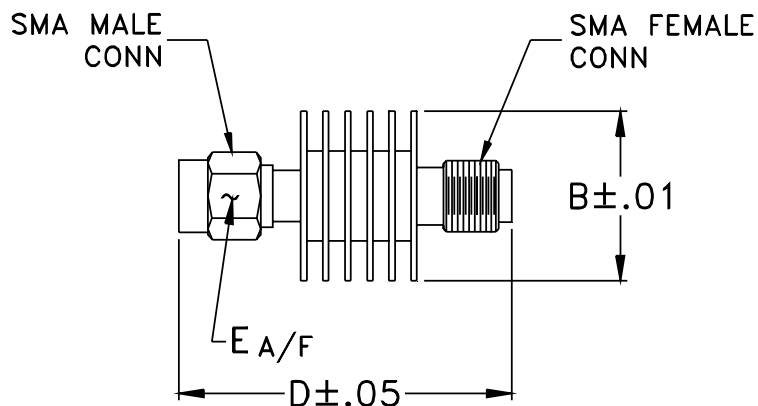

OUTLINE DIMENSIONS (Inch mm)

B	D	E	wt
.74	1.43	.312	grams
18.80	36.32	7.92	11.4



Mini-Circuits

COAXIAL

Fixed Attenuator


VAT-5W2+

50Ω 2 W 5 dB DC to 6 GHz SMA Female


TYPICAL PERFORMANCE DATA AND CHARTS

Frequency (MHz)	Attenuation (dB)	VSWR (:1)
10.00	4.99	1.00
100.00	5.03	1.01
1000.00	5.16	1.05
2000.00	5.22	1.06
3000.00	5.31	1.04
4000.00	5.41	1.03
4500.00	5.42	1.10
5000.00	5.45	1.20
5500.00	5.57	1.32
6000.00	5.68	1.51

VAT-5W2+
ATTENUATION

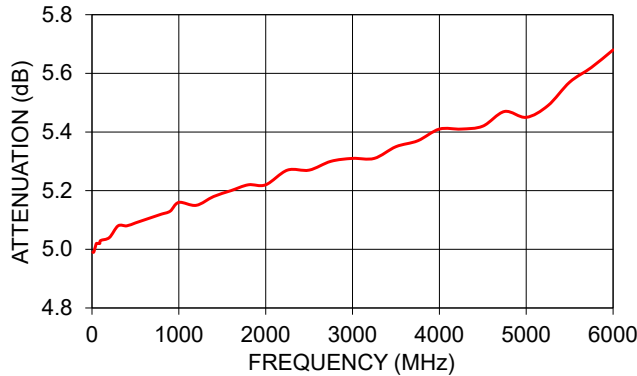

VAT-5W2+
VSWR

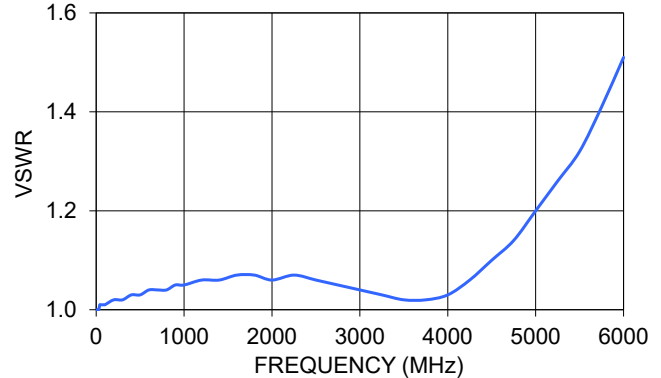

NOTES

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuits' applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits' standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the standard terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/terms/viewterm.html

